
· 1/2 2/2000

Form CP-3 Rev. 6-26-62

J. P. Roberts Assitant Director 500 Insurance Building 212 North Market Wichita 2, Kansas

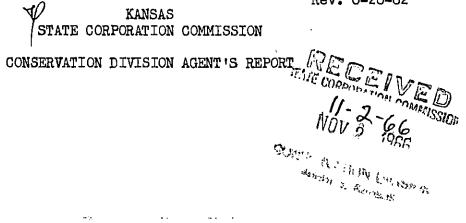

mix · · · · · · · · · · · · · · · · · · ·
Operator's Full Name Mull Drilling Company, Inc.
Complete Address: 1625 Wichita Plaza Bldg., Wichita, Kansas
Lease Name Tonn Well No. # A-1
Location <u>C SW SW</u> Sec. 29 Twp. 30 Rge. 5 (E) (W) W
County Kingman Total Depth 4582
Abandoned Oil Well Gas Well Input Well SWD Well D & A X
Other well as hereafter indicated:
Plugging Contractor: Jim Donelson Drilling Company
Address: 212 Derby Bldg., Wichita, Kansas License No.
Operation Completed: Hour10:30AM Day 1st Month Nov. Year 1966
The Above well was plugged as follows:
247' of 8 5/8" surface pipe, cement circulated with 200 sacks. Hole
was filled with drilling mud to 240', 1st cementing plug, bridged with
2 sacks of dry cement and 2 sack of hulls on fluid at 240, and cemented
with 23 sacks, through the drill pipe. Hole was filled with drilling
mud to 40°, 2nd cementing plug, bridged with 1 sack of dry cement and
½ sack of hulls on fluid at 40°, and cemented with 9 sacks to the base
of the cellar. Rat hole bridged and cemented with 2 sacks.
This cementing was done by Globe Cementing Company.
I hereby certify that the above well was plugged as herein stated. N V O C E D Signed: Well Plugging Supervisor (
INV. NO. 4221-W