

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-175-21607-00-00
Spot: NENESE Sec/Twnshp/Rge: 26-32S-32W
2310 feet from S Section Line, 330 feet from E Section Line
Lease/Unit Name: BALL Well Number: 1
County: SEWARD Total Vertical Depth: 3200 feet

Operator License No.: 4058
Op Name: AMERICAN WARRIOR, INC.
Address: PO BOX 399
GARDEN CITY, KS 67846

Production Casing Size: 4.5 feet: 3100 WITH 600 SX CMT
Surface Casing Size: 8.625 feet: 540 WITH 305 SX CMT

#104^o

Well Type: GAS UIC Docket No: _____ Date/Time to Plug: 08/06/2003 1:30 PM
Plug Co. License No.: 99996 Plug Co. Name: ALLIED CEMENT COMPANY
Proposal Rcvd. from: JODY Company: AMERICAN WARRIOR Phone: (620) 275-7461

Proposed Plugging Method: PUMP 200# HULLS & 20 SX CMT. FILL WITH CMT TO SURFACE. PRESSURE TEST. CHECK BACKSIDE.

Plugging Proposal Received By: JIM HOLLAND Witness Type: Plugging Operations 100% Witnessed (Complete)
Date/Time Plugging Completed: 08/06/2003 3:00 PM KCC Agent: JIM HOLLAND

Actual Plugging Report:


PBTD 3160'. PERFS AT 3006-3088'. PUMP 200# HULLS & 20 SX CMT ON BOTTOM. PUMP 20 BBL MUD SPACER & 75 SX CMT TO SURFACE. PRESSURED 4 1/2" TO 500 PSIG & SHUT IN. RIG UP TO BACKSIDE & PUMP 25 SX CMT. PRESSURE TO 300 PSIG & SHUT IN.

RECEIVED
AUG 14 2003
KCC WICHITA

Remarks: USED 60/40 POZMIX 6% GEL BY ALLIED. NO CASING RECOVERED.

Plugged through: CSG

District: 01

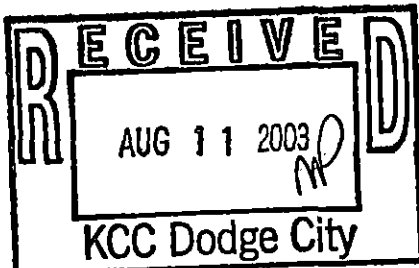

Signed Jim Holland PART II
(TECHNICIAN)

INVOICED
DATE 8-14-03
WV. NO. 2004060403

Form CP-23