

TO: STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-175-21050-00-00
Spot: SWSWNE Sec/Twnshp/Rge: 7-32S-32W
4030 feet from S Section Line, 1250 feet from E Section Line
Lease/Unit Name: DOROTHY Well Number: 1-7
County: SEWARD Total Vertical Depth: 2800 feet

Operator License No.: 5263 Conductor Pipe Size: 20 feet: 30 3 YDS CMT
Op Name: MIDWESTERN EXPLORATION COMPA Production Casing Size: 4.5 feet: 2799 WITH 525 SX CMT
Address: 3500 S BOULEVARD - SUITE 2B Surface Casing Size: 8.625 feet: 629 WITH 275 SX CMT
EDMOND, OK 73013

Well Type: GAS UIC Docket No: Date/Time to Plug: 08/15/2003 10:00 AM
Plug Co. License No.: 8733 Plug Co. Name: DUNKIN, JERRY, INC.
Proposal Rcvd. from: BUTCH DUNKIN Company: DUNKIN, JERRY, INC. Phone: (580) 237-6152

Proposed Plugging Method: CIBP @ 2600' WITH 2 SX CMT. LOAD HOLE WITH MUD. TBG TO 1700'. FILL 4 1/2" TO SURFACE. CHECK BACKSIDE.

Plugging Proposal Received By: JIM HOLLAND Witness Type: Plugging Operations 100% Witnessed (Complete)
Date/Time Plugging Completed: 08/15/2003 12:00 PM KCC Agent: JIM HOLLAND

Actual Plugging Report:


PBTD 2675'. PERFS AT 2662-2698 & 2724-2750'. SET CIBP @ 1950'. RUN TUBING TO 1940'. CIRCULATE HOLE WITH MUD. SPOT 5 SX CMT ON TOP OF CIBP. PULL OUT OF HOLE WITH TUBING TO 1700'. FILL 4 1/2" CASING TO SURFACE WITH 165 SX CMT. PUMP 10 SX CMT DOWN BACKSIDE. PRESSURE TO 300 PSIG & SHUT IN. PULL OUT OF HOLE WITH TUBING & TOP OFF 4 1/2" CASING.

RECEIVED
AUG 25 2003
KCC WICHITA

Remarks: USED CLASS A CMT BY JERRY DUNKIN, INC. NO CASING RECOVERED.

Plugged through: TBG

District: 01

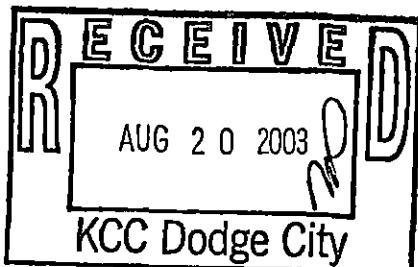

Signed

Jim Holland PIRTH
(TECHNICIAN)

INVOICED

DATE 9-2-03
INV. NO. 2003/060455

Form CP 228