


STATE OF KANSAS  
STATE CORPORATION COMMISSION

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
800 Bitting Building  
Wichita, Kansas

WELL PLUGGING RECORD

NORTH

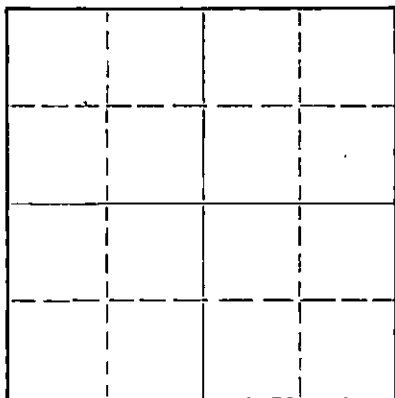

Locate well correctly on above  
Section Plat

Sedgwick

County. Sec. 5 Twp. 29 S Rge. 3 (E) W (W)

Location as "NE/CNW/SW" or footage from lines NE/4

Lease Owner Wm Broadhurst et al

Lease Name Zoglmann Well No. 1

Office Address First National Building, Tulsa, Oklahoma

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed 12 - 22 19 56

Application for plugging filed 12 - 21 19 56

Application for plugging approved 12 - 21 19 56

Plugging commenced 12 - 22 19 56

Plugging completed 12 - 22 19 56

Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Ruel Durkee

Producing formation Depth to top Bottom Total Depth of Well Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	209'	Surface Casing

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Stirred pits good, raised weight, filled hole to 209' - set bridge - 15 sacks of cement through 6 Jts. of Drill Pipe, filled hole to 25' with mud - set Plug - 5 sacks of cement.

12-27-56

STATE OF KANSAS

NOTARIAL

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Springer & Harper

Address P. O. Box 187, Valley Center, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.

L. L. Harper (Partner)

(employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature)

P. O. Box 187, Valley Center, Kansas


(Address)

SUBSCRIBED AND SWORN TO before me this 27 day of December 1956.

My commission expires Jan. 31, 1957

My commission expires

Notary Public.



## SPRINGER &amp; HARPER

DRILLING CONTRACTORS  
VALLEY CENTER, KANSAS

December 26, 1956

William Broadhurst et al  
First National Building  
Tulsa 3, OklahomaZoglmann # 1 NE/4 5-29S-3W,  
Sedgwick County, Kansas

soil	30
sand	45
shale & shells	209
lime & shells	220
shale	320
lime & shale	755
lime	930
lime & shale	980
lime	1370
lime & shale	1510
shale & shells	1725
lime & shale	2220
lime	2365
lime & shale	2900
sandy lime	2950
shale & lime	2960
sand & shale	3070
lime & shale	3150
lime	3380
lime & shale	3455
shale, lime & shells	3510
lime & shale	3615
shale & shells	3680
lime & shale	3740
lime, sand & chert	3760
lime	3784
lime	4015
chert & lime	4065
lime	4120
shale & lime	4160
shale	4200
chert, sand & shale	4210
sand	4275
shale & sand	4305
lime (cherty) T.D.	4325

## Casing

Ran set & cemented 209' of  
8 5/8" 8rd THD 32# Surface  
Casing, cemented W/200 sacks.RECEIVED  
STATE COMMISSION

DEC 27 1956

## PLUGGING

FILE NO 5 T 29 R 3 W  
BOOK 128 L 42CONCRETE DIVISION  
Wichita, Kansas

SPRINGER &amp; HARPER

By L. L. Harper  
L. L. Harper (Partner)