


15-129-10053-0600

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
211 No. Broadway  
Wichita, Kansas

WELL PLUGGING RECORD

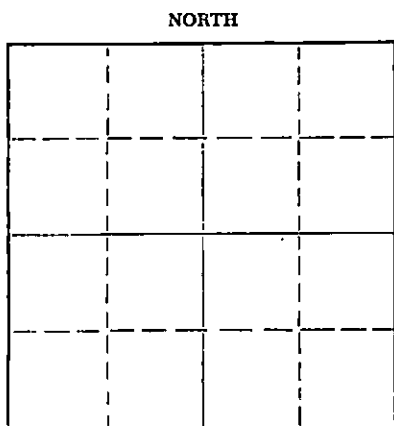

Locate well correctly on above  
Section Plat

Morton County, Sec. 34 Twp. 31 Rge. (E) 42 (W)  
Location as "NE/CNW%SW%" or footage from lines C W/2 SE/4  
Lease Owner Colorado Oil Company  
Lease Name Jackson Well No. 1-34  
Office Address 915 Union National Building, Wichita, Kansas 67202  
Character of Well (completed as Oil, Gas or Dry Hole) Gas  
Date well completed January 24 19 57  
Application for plugging filed March 22 19 68  
Application for plugging approved March 25 19 68  
Plugging commenced April 3 19 68  
Plugging completed April 6 19 68  
Reason for abandonment of well or producing formation Depleted

If a producing well is abandoned, date of last production March 19 68  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well E. Eves  
Producing formation Wabaunsee Depth to top 2798 Bottom 3040 Total Depth of Well 3250 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	707	None
Wabaunsee				5-1/2"	3235	2453

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Mix 25 sks. cement and 2 sks. hulls to plug off perforations at 2,805'. Stop plug at 2,707'. Circulate fresh gell at 900'. Pump 35 sks. cement at 700' to 600'. Put bridge and 10 sks. cement at 40' to 0'.

RECEIVED  
STATE CORPORATION COMMISSION  
APR 18 1968  
CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Sargent's Casing Pulling Service  
Address Box 506, Liberal, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.  
L. H. Walters (employee of owner) or (~~SWORN OPERATOR~~) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) L. H. Walters  
915 Union National Building, Wichita, Kansas 67202  
(Address)

SUBSCRIBED AND SWORN TO before me this 17th day of April, 19 68

My commission expires August 19, 1971

Helen L. Martin  
Helen L. Martin Notary Public.

15-129-10053-0000


WELL LOG BUREAU—KANSAS GEOLOGICAL SOCIETY  
508 East Murdock, Wichita, Kansas

Company- COLORADO OIL & GAS CO.  
Farm- Jackson G.U. No. 1

SEC. 34 T. 31 R. 42W  
6 W 1/2 SE

Total Depth. 3250'  
Comm. 1-2-57 Comp. 1-6-57  
Shot or Treated.  
Contractor. Holm Drlg. Co.  
Issued. 2-16-57

County Morton  
KANSAS



Elevation. 3509'

Production. 6,400,000 CFGPD

Figures indicate Bottom of Formations:

sand-clay	350
red rock	490
shale-shells	738
shale-shells	1070
gyp shale shells	1150
shale shells-sand	1245
sand	1290
sand	1415
shale-shells	1480
Anhydrite	1505
shale-shells	2480
lime-shale	3250
Total Depth	

TOPS: Scout	
Waubensee	2798
Elmont	3043
Topeka	3218

RECEIVED  
STATE CORPORATION COMMISSION  
MAR 25 1968  
CONSERVATION DIVISION  
Wichita, Kansas