

15-119-00055-0000

STATE OF KANSAS
STATE CORPORATION COMMISSION


WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division,
State Corporation Commission
211 No. Broadway
Wichita, Kansas

Meade County. Sec. 26 Twp. 31 Rge. (E) 30 (W)

Location as "NE/CNW/SW" or footage from lines C SE/4
Lease Owner Sunray Mid-Continent Oil Co.
Lease Name Winter Well No. 1
Office Address Box # 788, Great Bend, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed May 29, 19 57
Application for plugging filed May 29, 19 57
Application for plugging approved June 3, 19 57
Plugging commenced May 29, 19 57
Plugging completed May 29, 19 57
Reason for abandonment of well or producing formation _____

NORTH

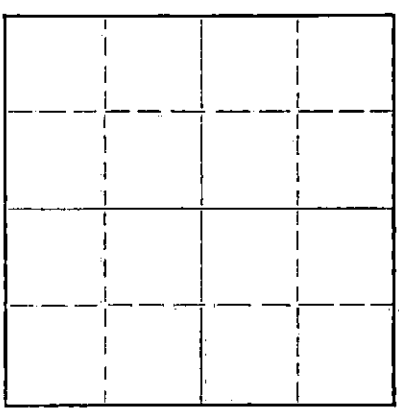

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well M. A. Rives
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 5745' Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	1612'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled hole w/ drlg mud to 600', set Halliburton plug w/ 1/3 sack hulls at 600' & 35 sacks cement on top of plug. Filled hole w/ mud to 35', set Halliburton plug w/ 1/3 sacks hulls and 15 sacks cement to surface. Plugging completed.

Well log attached.

RECEIVED
STATE CORPORATION COMMISSION
JUN 8 X 1957
CONSERVATION DIVISION

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Halliburton Oil Well Cementing co.
Address _____

STATE OF KANSAS COUNTY OF BARTON, ss.
N. E. Montgomery (employee of owner) or (~~owner~~) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) N. E. Montgomery
Box # 788, Great Bend, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 7 day of June, 19 57

My commission expires Dec. 24, 1960

Notary Public

Notary Public.

PLUGGING
FILE SEC. 26 T. 31 R. 30W
BOOK PAGE 17 LINE 5

Sunray Mid-Continent Oil Company
Tulsa, Oklahoma

Tulsa, Oklahoma
June 3, 1957

CONTRACTOR: Stickle Drilling Company
Drilling Commenced: May 2, 1957
Drilling Completed: May 30, 1957

Winter #1 - N/2 SE/4
of Section 26-31S-30W,
Meade County, Kansas.

15-119-00055-0000

DRILLERS LOG

Depth Figures Indicate Base of Formation

Shale	40
Shale & Sand	140
Clay & Shale	510
Shale & Shells	970
Anhydrite	1010
Shale & Shells	1570
Lime	1613
Shale & Sand	1880
Shale & Shells	2445
Lime & Shale	2670
Shale & Lime	2970
Lime	3270
Lime & Shale	3870
Sandy Lime	3995
Lime	4386
Lime & Shale	4440

Lime	4689
Lime & Shale	4726
Lime	4916
Lime & Shale	5100
Lime	5130
Lime & Shale	5209
Lime	5251
Lime & Shale	5309
Lime	5353
Lime & Shale	5411
Lime	5445
Lime & Shale	5515
Lime	5545
Lime & Shale	5550
Lime, Chert & Shale	5591
Lime	5645
Shale & Lime	5734
Lime	5745

I, Frank E. Stickle, hereby certify the above to be a true and complete Driller's Log of Sunray Mid-Continent Oil Company's Winter #1, N/2 SE/4 of Section 26-31S-30W, Meade County, Kansas.

Frank E. Stickle
Frank E. Stickle

Lillian T. Bonham
Notary Public

February 13, 1960
My Commission Expires

PLUGGING
FILE SEC. 26 T. 31 R. 30W
BOOK PAGE 17 LINE 5