

STATE OF KANSAS  
STATE CORPORATION COMMISSION  
200 Colorado Derby Building  
Wichita, Kansas 67202

WELL PLUGGING RECORD  
K.A.R.-82-3-117

API NUMBER 15-175-21428-0000

LEASE NAME Schmidt

WELL NUMBER B-2

3460 Ft. from S Section Line

3866 Ft. from E Section Line

SEC. 6 TWP. 31 RGE. 31 (E) of (W)

COUNTY Seward

Date Well Completed \_\_\_\_\_

Plugging Commenced 1-20-95

Plugging Completed 1-20-95

TYPE OR PRINT  
NOTICE: Fill out completely  
and return to Cons. Div.  
office within 30 days.

LEASE OPERATOR Helmerich and Payne, Inc.

ADDRESS P.O. Box 558, Garden City, KS 67846

PHONE#(316) 276-3693 OPERATORS LICENSE NO. 5293

Character of Well Gas

(Oil, Gas, D&A, SWD, Input, Water Supply Well)

The plugging proposal was approved on 1-4-95 (date)

by Steve Durant (KCC District Agent's Name)

Is ACO-1 filed? yes If not, is well log attached? \_\_\_\_\_

Producing Formation Upper Krider Depth to Top 2648 Bottom 2660 T.D. 2675

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

| Formation    | Content | From | To   | Size  | Put In | Pulled out |
|--------------|---------|------|------|-------|--------|------------|
| Upper Krider | Gas     | 2648 | 2660 | 3-5/8 | 622    | 0          |
|              |         |      |      | 5 1/2 | 2675   | 0          |
|              |         |      |      |       |        |            |
|              |         |      |      |       |        |            |

Describe in detail the manner in which the well was plugged, indicating where the mud fluid placed and the method or methods used in introducing it into the hole. If cement or other were used, state the character of same and depth placed, from feet to feet each  
RU Halliburton. Mix and pump 40 sks 65/35 Poz "C" w/ 6% gel containing 2 sacks cotton seed hulls. Displace to approximately 2100' with 50 barrels fresh water well squeezed off with 175 psi. Held OK 5 min. Bleed pressure off casing. THH w/ 2-3/8" tubing to 752'. Pump 50 sks. 65/35 Poz "C" cement w/ 6% gel. Good returns but cement did not circulate TOOH w/ 2-3/8" tbg.  
(If additional description is necessary, use BACK of this form.)

Name of Plugging Contractor Halliburton License No. \_\_\_\_\_

Address Liberal, Kansas

NAME OF PARTY RESPONSIBLE FOR PLUGGING FEES: Helmerich and Payne, Inc.

STATE OF Kansas COUNTY OF Finney, ss.

Ken Jehlik


above-described well), being first duly sworn on oath, says: That I have knowledge of the facts stated, and matters herein contained and the log of the above-described well as filed the same are true and correct, so help me God.

(Signature) Ken Jehlik AC

(Address) P.O. Box 558, Garden City, KS

SUBSCRIBED AND SWORN TO before me this 23rd day of January, 1995

My Commission Expires: August 15, 1996

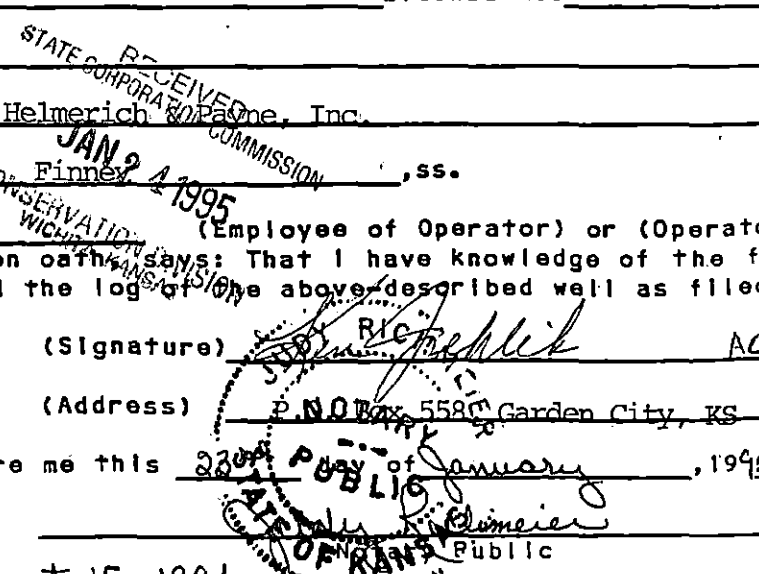

Set surface plug with 1/2 sx. hulls and 1 sack ready mix cement. Cut off casing 4' below ground level and weld on plate. Richard Lacey with Dodge City Office of KCC witnessed plugging.

| Plug | Depth       | Character                                   |
|------|-------------|---|
| 1    | 2100'-2660' | 40 sxs 65/35 Poz "C" cement w/ 2 sxs. hulls |
| 2    | 50'-750'    | 50 sxs 65/35 Poz "C" cement                 |
| 3    | 4'-10'      | 1 sack cement                               |

