


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

NORTH

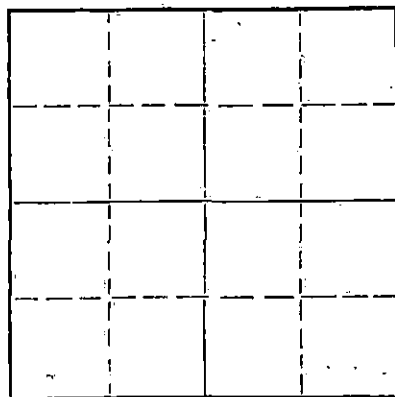

Locate well correctly on above
Section Plat

Kingman County, Sec. 14, Twp. 30S, Rge. 7W (E) (W)
Location as "NE/CNW/SW" or footage from lines: C SW/4 SE/4 NW/4
Lease Owner: Youngblood & Youngblood W/2
Lease Name: Kinert Well No. 1
Office Address: Box 552, Oklahoma City, Oklahoma
Character of Well (completed as Oil, Gas or Dry Hole): Dry Hole
Date well completed: June 22 1962
Application for plugging filed: June 22 1962
Application for plugging approved: June 22 1962
Plugging commenced: June 23 1962
Plugging completed: June 23 1962
Reason for abandonment of well or producing formation: Dry Hole

If a producing well is abandoned, date of last production: 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well: Herman Justice
Producing formation: None Depth to top: Bottom: Total Depth of Well: 4141 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Surface Pipe		0	265	8-5/8	265	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Hole was filled with heavy drilling mud from 4141' to 265'. Cement plug and 1/4 sack of hulls placed from 265' to 200'. Heavy drilling mud placed from 200' to 40'. Cement plug and 1/4 sack of hulls placed from 40' to 3'. Hole filled with surface dirt from 3' to ground level. Rat hole bridged and plugged with 2 sacks of cement.

RECEIVED
STATE CORPORATION COMMISSION
JUN 26 1962
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor: Gabbert Jones Drilling Company
Address: 514 Orpheum Building, Wichita, Kansas

STATE OF OKLAHOMA, COUNTY OF OKLAHOMA, ss.
H. M. Frost (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) H. M. Frost
Box 552, Oklahoma City, Oklahoma (Address)

SUBSCRIBED AND SWORN TO before me this 25th day of June, 1962

Carl A. Robinson Notary Public.

My commission expires October 12, 1962

INVOICED

DATE 6/26/62

INV. NO. 5248-W