

STATE OF KANSAS  
STATE CORPORATION COMMISSION

Form CP-4


Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
211 No. Broadway  
Wichita, Kansas

WELL PLUGGING RECORD

Sumner County, Sec. 31 Twp. 30S Rge. 1 (EX 1) (W)

Location as "NE/CNW/SW" or footage from lines SW SE  
Lease Owner Beardmore Drilling Company  
Lease Name Guldner Well No. 2  
Office Address 700 - 120 Bldg., Wichita, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole) Dry hole  
Date well completed January 28 19 67  
Application for plugging filed January 28 19 67  
Application for plugging approved January 28 19 67  
Plugging commenced January 28 19 67  
Plugging completed January 28 19 67  
Reason for abandonment of well or producing formation dry hole

NORTH

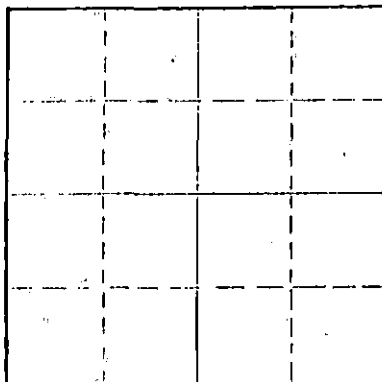

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced?

Name of Conservation Agent who supervised plugging of this well Paul Turpin, Clearwater, Kansas  
Producing formation Depth to top Bottom Total Depth of Well 3718 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Shale and shells		0	280'			
Shale and Anhydrite		280'	435'	8-5/8"	435'	-0-

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

0 to	40'	-	8 sacks cement
	40'	-	wood plug
40 to	180'	-	heavy mud
180 to	240'	-	20 sacks cement
	240'	-	wood plug
240 to	3718'	-	heavy mud

RECEIVED  
STATE CORPORATION COMMISSION

Also: 2 sacks cement in rat hole

FEB 21 1967

CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor Shawver-Armour, Inc.  
Address 817 Central Bldg., Wichita, Kansas

STATE OF KANSAS COUNTY OF SEDGWICK, ss.

Heber Beardmore (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Heber Beardmore  
700 - 120 Bldg., Wichita, Kansas (Address)

Subscribed and Sworn to before me this 9th day of February, 19 67

My commission expires 7-13-67

Shirley Ann Jackson Notary Public

