


15-191-30043-00002

STATE OF KANSAS
STATE CORPORATION COMMISSION
Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

Form CP-4

WELL PLUGGING RECORD

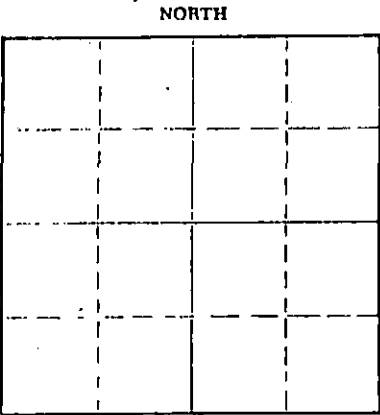

Locate well correctly on above
Section Plot

Sumner County, Sec. 7 Twp. 30S Rge. (E) 2 (W)
Location as "NE/CNW/SW" or footage from lines NW NE
Lease Owner Shawver Armour, Inc.
Lease Name Shinn Well No. 1-A
Office Address 817 Central Building Wichita, Ks.
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed Sept 3 19 65
Application for plugging filed Sept 3 19 65
Application for plugging approved Sept 3 19 65
Plugging commenced Sept 3 19 65
Plugging completed Sept 3 19 65
Reason for abandonment of well or producing formation Dry Hole
If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes - Howard Hess

Name of Conservation Agent who supervised plugging of this well
Producing formation Depth to top Bottom Total Depth of Well 3776 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS				CASING RECORD		
FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
surface	water	-0-	225'	8 5/8"	225'	none

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Heavy mud to 250' Howco Plug
1/2 sack of Hulls & 20 sacks of cement
Heavy mud to 35' Howco Plug 1/2 sack Hulls & 8 sacks cement
Bridged rat hole @ 8' 2 sacks cement

RECEIVED
STATE CORPORATION COMMISSION

SEP 14 1965

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Shawver Armour, Inc.
Address 817 Central Building, Wichita, Kansas

STATE OF KANSAS COUNTY OF SEDGWICK ss.

(employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) James M. Armour
James M. Armour, 817 Central Bldg.
Wichita, Kansas (Address)

SUBSCRIBED AND SWORN to before me this 10th day of September, 19 65

My commission expires Dec 10, 1967
Claire Jones Notary Public.

D R I L L E R ' S L O G

FARM NAME: SHINN #1-A LOCATION: NW NE Sec 7-30S-2W,
 Contractor: SHAWVER ARMOUR, INC. Sumner County, Kansas
 OWNER: SHAWVER ARMOUR, INC. ELEVATION: 1340 KB
 COMMENCED: August 24, 1965 COMPLETED: September 3, 1965
 CASING RECORD: 225' 8 5/8" w/165 sacks cement & 4 sacks chloride

FORMATION:

Soil	10
Hard gray shale	225
Shale	500
Shale & Lime	865
Lime & Shale	1275
Shale & Lime	2803
Stalnaker Sand	2934
Shale & Lime	3178
Lime	3244
Kansas City Lime	3303
Lime	3337
Shale & Lime	3515
Lime & Shale	3734
Mississippian Lime	3776
Rotary Total Depth	3776

TOPS:

Stalnaker	2803
B Stalnaker	2934
Kansas City	3109
B Kansas City	3328
Mississippian	3735

RECEIVED
 STATE CORPORATION COMMISSION
 SEP 14 1965
 CONSERVATION DIVISION
 Wichita, Kansas

STATE OF KANSAS }
 SEDGWICK COUNTY } ss

I, James M. Armour, do hereby certify that the above log is a true and correct copy of the above captioned well as shown on the daily drilling reports.

SHAWVER ARMOUR, INC.

BY James M. Armour
 James M. Armour

Subscribed and sworn to before me this
 10th day of September, 1965.

My commission expires Dec 10th, 1967

Claire Jones
 Claire Jones