

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

Stevens County, Sec. 15 Twp. 34S Rge. 38W (E) (W)

Location as "NE/CNW&SW&" or footage from lines C NW

Lease Owner Panhandle Eastern Pipe Line Company

Lease Name Kelley Well No. 2-15

Office Address Box 828, Liberal, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Gas

Date well completed 8-29 19 65

Application for plugging filed 2-5 19 65

Application for plugging approved 2-8 19 65


Plugging commenced 2-24 19 65

Plugging completed 2-27 19 65

Reason for abandonment of well or producing formation Replaced

If a producing well is abandoned, date of last production January 19 65

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

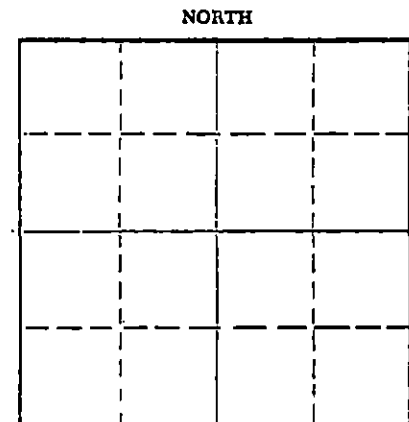

Name of Conservation Agent who supervised plugging of this well Hugh Scott

Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 2825 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				12-1/2	615	
				7	2565	
				4-1/2	2527	2520

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Pumped 125 sxs. cement to 1670'. Spotted 50 sxs. cement at 600', spotted 15 sxs. at 15'.

RECEIVED
STATE CORPORATION COMMISSION

MAR 12 1965

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Sargent's Casing Pulling Service

Address 1546 Clay Court, Liberal, Kansas

STATE OF KANSAS COUNTY OF SEWARD, ss.
J. P. Phillippe, Supt. Drlg. & Prod. (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) J. P. Phillippe

Box 828, Liberal, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 10th day of March, 1965

Donald L. Vangieson
Notary Public.

My commission expires My Commission Expires Sept. 29, 1968

Donald L. Vangieson

15-189-00635-0000


WELL LOG BUREAU - KANSAS GEOLOGICAL SOCIETY.
412 Union National Bank Bldg, Wichita, Kansas.

STEVENS COUNTY OIL & GAS CO.
Kelly No. 1

SEC. 15 T. 34 R. 38W.
Cor. NW 1/4

Total Depth. 2825
Comm. 10-24-35 Comp. 8-29-36
Shot or Treated.
Contractor. Kuhn Bros.
Issued. 3-20-37

County. Stevens.



CASING.

12 3/4" 615'
6 5/8" 2565'

Elevation.

Production. 7,612,511 G.
R.P. 416

Figures Indicate Bottom of Formations.

sand	60	
sand and gravel	600	
red bed	675	
red bed and gyp	1000	
sand hard	1050	
red bed and gyp	1080	
anhydrite	1120	
gyp	1145	
red bed and gyp	1300	
sand	1360	
red bed and gyp	1600	
sand	1615	
red bed	1705	
red bed and shells	1725	
lime	1750	
red bed and shells	1780	
gyp	1795	
red bed	1820	
gyp	1835	
red bed	1840	
red bed and gyp	1903	
red bed and gyp shells	1950	
red bed and gyp	2010	
lime	2015	
red bed	2020	
red bed and gyp	2035	
red bed with streaks of anhydrite	2082	
red bed and anhydrite	2114	
red bed and streaks of anhydrite	2154	
red bed and anhydrite	2308	
anhydrite	2497	
anhydrite and shale	2540	
anhydrite and lime	2565	
broken lime grey	2600	
lime grey	2665	gas 2645
limo	2705	Increase in gas 2685
sdv limo	2730	
shale blue and red rock	2775	increase in gas 2730
sand limo	2815	more gas 2790
shalo	2825	more

Total Depth.
Open flow 7,612,511 M.C.F.
R.P. 416#