

RECEIVED  
STATE CORPORATION COMMISSION


15-007-30198-0000

STATE OF KANSAS  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION  
P. O. BOX 17027  
WICHITA, KANSAS 67217

DEC 30 1974  
CONSERVATION DIVISION  
Wichita, Kansas

FORM CP-4

WELL PLUGGING RECORD

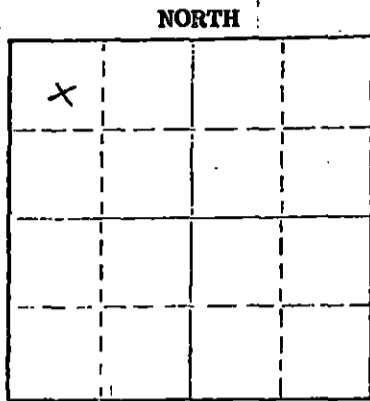

Barber County, Sec. 22 Twp. 31 Rge. 13 (E) W (W)  
Location as "NE/CNW/SE/SW" or footage from lines NW NW  
Lease Owner Okla. Fracturing Services, Inc., Okla. City, Okla.  
Lease Name Smith 'B' Well No. 1  
Office Address 630 United Founders Life Tower, 5900 Mosteller Dr.  
Character of Well (completed as Oil, Gas or Dry Hole) \_\_\_\_\_  
Date well completed August 12 1965  
Application for plugging filed October 1974  
Application for plugging approved October 1974  
Plugging commenced October 29 1974  
Plugging completed November 11 1974  
Reason for abandonment of well or producing formation Depleted

If a producing well is abandoned, date of last production July 6 1974  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Russell Biberstein  
Producing formation Douglas Depth to top 3721 Bottom 3748 Total Depth of Well 4660  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	297	Circ.
				5 1/2"	4640	3500

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

October 24, 1974 Plugged off bottom. Dumped sand to 3200'. Mixed and dumped 5 sx of cement.

November 11, 1974 Plugged off top. Allied Cementing Co. mixed and pumped down 8 5/8" surface casing, 2 sx of hulls, 10 sx of gel and 100 sx of cement.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor RUSS CASING PULLING, INC.  
Address P. O. Box 1082 ; Great Bend, Kansas 67530

STATE OF Oklahoma COUNTY OF Oklahoma ss.  
G. S. Cecil (employee of owner) or (owner/operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.  
(Signature)

630 United Founders Life Tower, OKC 73112  
(Address)

SUBSCRIBED AND SWORN TO before me this 30th day of December, 1974

My commission expires April 9, 1977

Phyllis Schroeder  
Phyllis Schroeder Notary Public




KANSAS GEOLOGICAL SOCIETY  
 KANSAS WELL LOG BUREAU - KANSAS WELL SAMPLE BUREAU  
 KANSAS GEOLOGICAL SOCIETY BUILDING  
 508 EAST MURDOCK - WICHITA, KANSAS

COMPANY **CRA, Inc.**  
 FARM **Smith** NO. **"B" #1**

SEC. 22 T. 31S R. 13W  
 LOG. NW NW

TOTAL DEPTH **4,660'**  
 COMM. **5-21-65** COMP. **6-5-65**  
 SHOT OR TREATED  
 CONTRACTOR **H-30, Inc.**  
 ISSUED

COUNTY **Barber**



**15-007-30198-0000**

CASING  
 20 10  
 15 5/8" 297.28 cem w/225 sx ELEVATION 1636 KB  
 12 6  
 13 5 1/2" 4,640 cem w/ 170 sx 1st stage  
 w/210 sx 2nd stage

FIGURES INDICATE BOTTOM OF FORMATIONS

Top Soil	10
Rock & Shale	100
Shale, clay, sand	240
Shale, red bed	306
Shells, shale, red bed	760
Shale & Shells	1233
Shells & Shale	1295
Shale & Shells	1670
Lime & Shale	1930
Shale & Lime	2110
Lime & Shale	2290
Shale & Lime	3209
Lime & Shale	3390
Shale & Lime	3655
Lime & Shale	3740
Shale & Lime	3780
Lime	4239
Lime & Chert	4275
Cherty Lime	4400
Shale & Lime	4536
Shale, Lime & Chert	4598
Lime & Shale	4660
Rotary T. D.	4660

**RECEIVED**  
 STATE CORPORATION COMMISSION  
 NOV 4 1974  
 CONSERVATION DIVISION  
 Wichita, Kansas

Electric Log Tops

Heebner	3590	-1954
Lower Douglas Sand	3726	-2090
Lansing-Kans. City	3765	-2129
Massey	4215	-2579
Mississippian	4262	-2626
Kinderhook	4412	-2776
Viola	4490	-2854
Simpson Shale	4536	-2900
Simpson Sand	4552	-2916
Arbuckle	4620	-2984

- 3594 - 1958

I hereby certify the above and foregoing to be a true and correct log of the above described well, as shown by the drilling reports.

H-30, INC.  
*Garnet B. Douthit*  
 Garnet B. Douthit

STATE OF KANSAS )  
 SEDGWICK COUNTY ) SS:

Subscribed and sworn to before me, a Notary Public in and for said county and state, this 10th day of June, 1965.

*Geraldine Hays*  
 Geraldine Hays, Notary Public

My Commission Expires:  
 12-3-68