

15-191-20312-0000

9

STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas 67202

WELL PLUGGING RECORD

Sumner County, Sec. 30 Twp. 30S Rge. (E) 2 (W)

Location as "NE/CNW%SW%" or footage from lines C NW SE

Lease Owner Hummon Oil Company

Lease Name Pauly Well No. 1

Office Address 6409 East 14th Street, Wichita, Kansas 67206

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed 11-29 19 71

Application for plugging filed 11-29 19 71

Application for plugging approved 11-29 19 71


Plugging commenced 11-29 19 71

Plugging completed 11-29 19 71

Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

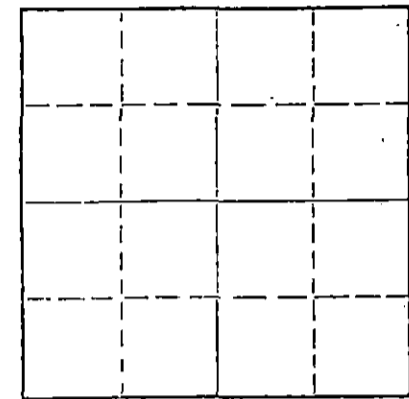

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Gene Graham

Producing formation Depth to top Bottom Total Depth of Well 421 1/2 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	265'	- - - -

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Hole mudded to 240'
1/2 sack Hulls, plug, and 20 sacks cement
Mud to 40'
1/2 sack Hulls, plug, and 8 sacks cement
Rathole capped with 2 sacks cement

RECEIVED
STATE CORPORATION COMMISSION
DEC 3 1971
CONSERVATION DIVISION
Wichita, Kansas

Name of Plugging Contractor White & Ellis Drilling, Inc.
Address Box 448, El Dorado, Kansas

STATE OF Kansas, COUNTY OF Butler, ss.
Ernest Sifford (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Ernest Sifford
(Address)

Subscribed and sworn to before me this 2nd day of December, 19 71

September 26, 1972
L. B. Auer
Notary Public.





CASING RECORD

8 5/8"

265' Cemented
w/200 sacks

Location: C NW SE
Section: 30-30S-2W
Sumner County, Kansas
Farm: Pauly #1
Well Owner: Hummon Oil, Incorporated
Contractor: WHITE & ELLIS DRILLING, INC.
Commenced: 11-16-71
Completed: 11-29-71

Total Depth

421 1/2'

KELLY BUSHING MEASUREMENT 5' ABOVE GROUND LEVEL

FORMATION	DEPTH
Cellar & Sod	0-15
Shale & Lime	515
Lime w/Shale (Stks.)	655
Shale & Lime	1444
Shale	1790
Lime & Shale	1810
Shale & Lime (Sdy)	2040
Lime & Shale	2315
Shale & Lime (Stks.)	2460
Lime & Shale	2765
Shale	2926
Sand	2950
Shale	3148
Lime	3390
Shale & Lime	3465
Shale & Lime (Stks.)	3675
Shale	3780
Lime	3783
Core #1	3789
Lime	4133
Shale	4204
Sand	4210
Core #2	421 1/2

DRY HOLE

PLUGGED & ABANDONED

TOPS

Kansas City	3148
Mississippi	3780
Simpson	4204

RECEIVED
STATE CORPORATION COMMISSION
DEC 3 1971
CONSERVATION DIVISION
Wichita, Kansas