


15-191-01000-0000

STATE OF KANSAS  
STATE CORPORATION COMMISSION  
Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
211 No. Broadway  
Wichita, Kansas

WELL PLUGGING RECORD

T - 30S NORTH R - 2W

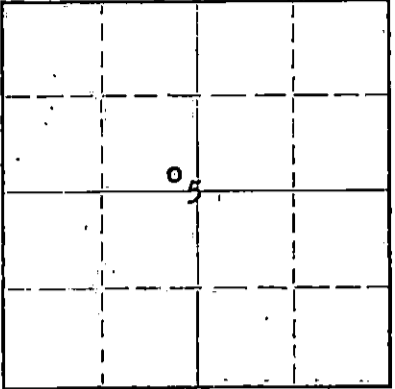

Locate well correctly on above Section Plat

Sumner County, Sec. 5 Twp. 30S Rge. 2 (E) W(W)  
SE SE NW  
Location as "NE/CNW/SW" or footage from lines  
Lease Owner Frank J. Black  
Lease Name Kennedy Well No. 1  
Office Address McPherson, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole) Oil  
Date well completed 1-23-59 19  
Application for plugging filed 12-5-61 19  
Application for plugging approved 12-6-61 19  
Plugging commenced 1-2-62 19  
Plugging completed 1-4-62 19  
Reason for abandonment of well or producing formation Depleted.

If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Lee Guthrie  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 3210 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	200'	None
				5-1/2"	3210'	2759'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Checked hole, sanded hole to 3100' and dumped 5 sacks of cement @ 3100' with dump bailer. Pulled 5 1/2" casing, Set rock bridge @ 180' and ran 15 sacks of cement. Mudded hole to 35', set rock bridge and ran 10 sacks of cement to base of cellar.

PLUGGING COMPLETE.

RECEIVED  
STATE CORPORATION COMMISSION  
JAN 17 1962  
CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor Knight Casing Pulling Company  
Address Chase, Kansas

STATE OF Kansas COUNTY OF Rice, ss.  
Nel J. Knight (employee of owner) or (owner/lessor) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Nel J. Knight  
Chase, Kansas (Address)

SUBSCRIBED AND SWORN TO before me this 9th day of January, 19 62

My commission expires May 20, 1964 Milton J. Volin Notary Public.



15-191-01000-0000

WELL LOG BUREAU—KANSAS GEOLOGICAL SOCIETY  
508 East Murdock, Wichita, Kansas


COPY

Company- BEDELL- CATT DRILLING CO.  
Farm- Kennedy No. 1

SEC. 5 T. 30 R. 2W  
SE SE NW

Total Depth. 3210'  
Comm. 1-13-59 Comp. 1-23-59  
Shot or Treated.  
Contractor. Bedell-Catt Drig.  
Issued. 7-4-59

County Sumner  
KANSAS



Elevation. 1298'

Production. -25 -BOPD

Figures indicate Bottom of Formations.

surface hole	200
lime & shale	2635
shale, sand & lime	2850
shale & lime	2965
shale	3001
K. C. lime	3027
lime	3210
Total Depth	

TOPS: SCOUT	
Stalnaker	2695
Kansas City	3004

RECEIVED  
STATE CORPORATION COMMISSION

JAN 15 1962

CONSERVATION DIVISION  
Wichita, Kansas