

STATE OF KANSAS
STATE CORPORATION COMMISSION
200 Colorado Derby Building
Wichita, Kansas 67202

WELL PLUGGING RECORD
K.A.R.-82-3-117

API NUMBER 15-191-22,009-0000

LEASE NAME Dixon

WELL NUMBER #1-4

TYPE OR PRINT
NOTICE: Fill out completely
and return to Cons. Div.
office within 30 days.

4950 Ft. from S Section Line

3960 Ft. from E Section Line

SEC. 4 TWP. 30 RGE. 2 ~~XXXX~~(W)

COUNTY Sumner

LEASE OPERATOR Pacific Petroleum, Inc.

ADDRESS 12160 Abrams Road, Suite 417, Dallas, TX 75243

PHONE#(214) 437-9957 OPERATORS LICENSE NO. 03338

Date Well Completed 10-03-87

Character of Well Oil & Gas

Plugging Commenced 10-03-87

(Oil, Gas, D&A, SWD, Input, Water Supply Well)

Plugging Completed 10-03-87

Did you notify the KCC District Office prior to plugging this well? Yes

Which KCC Office did you notify? Don Thompson

Is ACO-1 filed? If not, is well log attached? Yes

Producing Formation Depth to Top Bottom T.O. 3220'

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put in	Pulled out
	Surface	0	260	8 5/8"	248.72'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet each set.

35 sacks cement @ 1250'; 35 sacks cement @ 300'; 25 sacks cement @ 60' to surface; 10 sacks cement in rat hole

(If additional description is necessary, use BACK of this form.)

Name of Plugging Contractor EDCO Drilling Company, Inc. License No. 5676


Address P. O. Box 645, El Dorado, KS 67042

STATE OF KANSAS COUNTY OF BUTLER, ss.

(Employee of Operator) or (Operator) of above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed that the same are true and correct, so help me God.

(Signature) W. K. Truchgraber

(Address) P.O. Box 645, El Dorado, KS 67042

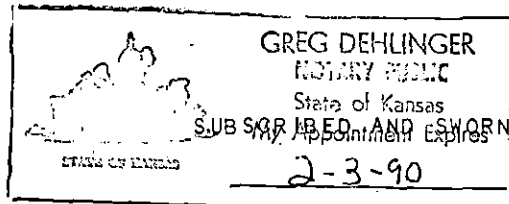

TO before me this 8th day of October, 19 87

Greg Dehlinger
STATE CORPORATION COMMISSION
NOTARY PUBLIC

My Commission Expires: 2-3-90


CONSERVATION DIVISION
Wichita, Kansas

Form CP-4
Revised 07-86

15-191-22009-0000



DRILLING COMPANY, INC.



~~XXXXXXXXXX~~ — P.O. BOX 645 — EL DORADO, KANSAS 67042

October 7, 1987

To: Pacific Petroleum, Inc.
12160 Abrams Road #417
Box 11
Dallas, TX 75243

Lease: Dixon #1-4

Location: Sec. 4, Twp. 30S, Rg. 2W
Sumner County, Kansas

Drilling Dates: September 23, 1987 through October 3, 1987

Surface TD: 260 ft
Surface Set: 248.72 ft of 8 5/8" surface casing
Cemented By: Sun Cementing, ticket 1975

0 - 260	Surface hole
260 - 1030	Shale and lime
1030 - 1225	Lime and sand with shale streaks
1225 - 1531	Shale and sand
1531 - 2573	Shale with lime
2573 - 2710	Shale and sand
2710 - 2806	Sand
2806 - 2922	Shale with lime
2922 - 3019	Shale
3019 - 3220	Kansas City
3220	TD

Drilling Log

RECEIVED
STATE CORPORATION COMMISSION

OCT 9 1987

CONSERVATION DIVISION
Wichita, Kansas