

STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas


WELL PLUGGING RECORD

Kingman

County. Sec. 4 Twp. 30S Rge. (E) 7 (W)

Location as "NE/CNW/SW" or footage from lines C NE NE SE/4
Lease Owner. Pickrell Drilling Company
Lease Name. Early "B" Well No. 2
Office Address. 705 4th Nat'l Bk. Bldg., Wichita, Kansas 67202
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed February 5, 1968
Application for plugging filed February 5, 1968
Application for plugging approved February 8, 1968
Plugging commenced February 5, 1968
Plugging completed February 5, 1968
Reason for abandonment of well or producing formation Dry Hole

NORTH



Locate well correctly on above
Section Flat

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Archie Elving
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4496' Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	203'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Heavy mud to 200'. Set plug. Cemented with 20 sacks
cement. Heavy mud to 40'. Set plug. Cemented to bottom
of cellar with 10 sacks cement. Plugged rat hole w/2 sacks
cement.

RECEIVED
STATE CORPORATION COMMISSION
FEB 15 1968
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Pickrell Drilling Company
Address 705 Fourth National Bnak Bldg., Wichita, Kansas 67202

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.
C. W. Sebitts


(employee or owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) C. W. Sebitts
705 4th Nat'l Bk Bldg, Wichita, Ks. 67202
(Address)

Subscribed and sworn to before me this 13th day of February, 1968

L. M. Whiting
L. M. Whiting Notary Public.

My commission expires May 10, 1970

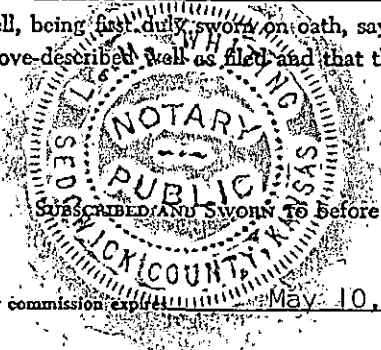

ROTARY DRILLING LOG

COMPANY: Pickrell Drilling Company
705 Fourth National Bank Bldg.
Wichita, Kansas 67202

Rotary Drilling Commenced 1/23/68

Rotary Drilling Completed 2/5/68

LOCATION: Early "B" No. 2
C NE NE ^{SE 1/4} Section 4-30S-7W
Kingman County, Kansas

CONTRACTOR: **PICKRELL DRILLING COMPANY**
Wichita, Kansas

CASING RECORD: (10 jts.) 8 5/8" surface pipe set at 203' and cemented with 145 sacks common cement. Circ. No oil string was run. D. & A., plugged 2/5/68.

LOG

(Figures indicate bottom of formation — measurements from top of rotary bushing.)

203	Red Rock & Cement	C. F. S.	
390	Red Bed & Shale	<u>3310'</u>	
885	Shale	3575'	
2195	Lime & Shale	3621'	
2694	Shale	3690'	
2894	Shale & Lime	3720'	
3052	Sandy Lime & Shale	3750'	
3280	Shale & Lime	4135'	
3370	Lime	4457'	
3475	Lime & Shale	4488'	
3601	Lime	4496'	
4078	Lime & Shale		
4360	Miss: Lime & Chert		
4484	Kinderhook Shale	S. L. M.	
4496	Simpson Sand, RTD	<u>3701.15'</u>	Board
		<u>3700.97'</u>	Strap
		.18'	

Slope Tests
3000'
3500'
4000'

RECEIVED
STATE CORPORATION COMMISSION
FEB 15 1968
CONSERVATION DIVISION
Wichita, Kansas

The undersigned, C. W. Sebitts, Attorney-in-Fact for PICKRELL DRILLING COMPANY, hereby certifies in behalf of said Company, that the above is a true and correct log of the formation encountered in drilling the above well as reflected by the Daily Drilling Reports.

PICKRELL DRILLING COMPANY

By C. W. Sebitts Attorney-in-Fact

STATE OF KANSAS }
COUNTY OF SEDGWICK } ss.:

On this 15 day of February, 1968, before me the undersigned, a Notary Public, in and for the County and State aforesaid, personally appeared C. W. Sebitts, to me known to be the identical person who subscribed the name of PICKRELL DRILLING COMPANY to the foregoing instrument as its Attorney-in-Fact and acknowledged to me that he executed the same as his free and voluntary act and deed, and as the free and voluntary act and deed of such company, for the uses and purposes therein set forth.

Given under my hand and seal of office the day and year last above written.

My commission expires: May 10, 1970

L. M. Whiting
Notary Public

L. M. Whiting

