


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Seward County, Sec. 16 Twp. 32SRge. 33 E/W
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines
1620' FWL X 660' FSL.
Lease Owner Amoco Production Company
Lease Name Griffith Well No. 1
Office Address P. O. Box 432, Liberal, KS 67901
Character of Well (Completed as Oil, Gas or Dry Hole)

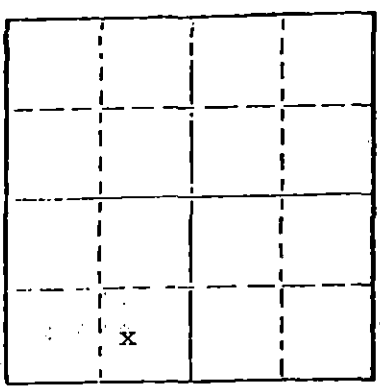

Dry Hole
Date Well completed October 1 1980
Application for plugging filed August 20 1980
Application for plugging approved August 26 1980
Plugging commenced September 30 1980
Plugging completed October 1 1980
Reason for abandonment of well or producing formation

Non-Productive
If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Clarence Thomas
Producing formation None Depth to top Bottom Total Depth of Well 6000
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Morrow	Sand	0	1630	8- 5/8	1622	0
Chester	Lime	0	6000	5- 1/2	5993	3361

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set. Pmp 65 sx cmt from 1580' to 1480', 25 sx cmt from 780' to 700' and 10 sx cmt 50' to 5'. Cut 8 5/8" csg 4 ft below ground level and weld on cap. (9-15-80 set cmt retainer at 4405'; Squeeze Lansing "H" with 75 sxs cmt and left 3 sx cmt on top of retainer).

RECEIVED
STATE CORPORATION COMMISSION
OCT - 8 1980
CONSERVATION DIVISION
Wichita, Kansas


(If additional description is necessary, use BACK of CONSERVATION sheet)
Name of Plugging Contractor Midwest Casing Pullers

STATE OF Kansas COUNTY OF Seward, ss.
Gale McCord (employee of owner) or (owner or operator)
of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Gale McCord Gale McCord
P. O. Box 432 - Liberal, KS 67901
(Address)

SUBSCRIBED AND SWORN TO before me this 6th day of October, 1980

J. L. Dressen
J. L. Dressen
Notary Public.



AMOCO PRODUCTION CO.

GRIFFITH WELL NO. 1
SEWARD COUNTY, KANSAS

OPERATIONS COMMENCED: 3/10/80

OPERATIONS COMPLETED: 3/25/80

DRILLING LOG

3/10	0 - 665	Sand
3/11	665 - 1631	Red Bed, Sand, Shale
3/12	1631 - 2160	Red Bed
3/13	2160 - 2800	Shale
3/14	2800 - 3244	Lime, Shale
3/15	3244 - 3678	Lime
3/16	3678 - 4070	Lime
3/17	4070 - 4463	Lime
3/18	4463 - 4748	Lime
3/19	4748 - 4956	Lime
3/20	4956 - 5150	Lime
3/21	5150 - 5438	Lime, Shale
3/22	5438 - 5675	Lime, Shale
3/23	5675 - 5916	Lime, Shale
3/24	5916 - 6000	Lime

CASING RECORD

3/11	Ran 41 jts. of 8 5/8", 24# casing. Set at 1630'. Cemented with 650 sks. of 65/35 with 2% c.c. Followed with 150 sks. with 3% c.c.
3/25	Ran 143 jts. of 5 1/2", 14# casing. Set at 6000'. Cemented with 475 sks. 65/35 with 10% Salt.

RECEIVED
STATE CORPORATION COMMISSION
AUG 22 1980
CONSERVATION DIVISION
Wichita, Kansas