

STATE OF KANSAS  
STATE CORPORATION COMMISSION

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
211 No. Broadway  
Wichita, Kansas

WELL PLUGGING RECORD

Meade County, Sec. 26 Twp. 33S Rge. 29W (X) (W)

Location as "NE/CNWxSWx" or footage from lines C NW/4

Lease Owner Ferguson Oil Company

Lease Name Gardner Unit Well No. 1

Office Address 427 Union Center, Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) D & A

Date well completed October 18 1961

Application for plugging filed October 18 19 61

Application for plugging approved October 18 19 61


Plugging commenced October 18 19 61

Plugging completed: October 18 19 61

Reason for abandonment of well or producing formation D&A

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

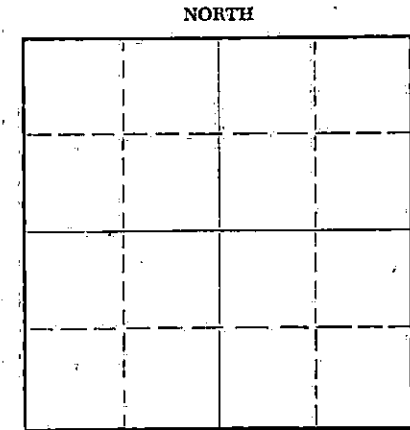

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Fred W. Hampel

Producing formation Depth to top Bottom Total Depth of Well 5890' Feet

Show depth and thickness of all water, oil and gas formations. (Schlumberger RTD 5895')

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	1521'	-0-

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Filling hole with heavy mud up to 750'. Set plug, 1/2 sx hulls, 20 sx cement. Filled hole up to 35' G1. set plug, 10 sx cement, 5 sx in rathole. Hole plugged @ 11:30 P.M.

RECEIVED  
STATE CORPORATION COMMISSION  
OCT 30 1961  
10-30-1961  
CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Red Tiger Drilling Company

Address Box 173 -- Russell, Kansas

STATE OF KANSAS, COUNTY OF Sedgwick, ss.

George A. Angle (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) George A. Angle

580 Fourth National Bank Bldg., Wichita, Kansas (Address)

SUBSCRIBED AND SWORN to before me this 20th day of October, 1961

Maple Head Notary Public.

My commission expires 11-17-62



DRILLERS LOG

Gardner Unit No. 1

CASING RECORD: 8 5/8" @ 1521'  
w/650 sx cement

COMPANY: Ferguson Oil Company

CONTRACTOR: Red Tiger Drilling Co.

COMMENCED: September 20, 1961

COMPLETED: October 18, 1961

TOTAL DEPTH: 5890'  
(Schlumberger RTD 5895')

DESCRIPTION: C NW/4  
26-33E-29W  
Meade County,  
Kansas

ELEVATION: 2507 DF  
2510 RD

<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>	<u>REMARKS</u>
Clay & Sand	0	240	
Shale & Shells	240	705	
Lime	705	738	
Shale & Shells	738	935	
Gloretta Sand	935	1020	
Shale & Shells	1020	1310	
Lime & Shells	1310	1499	
Anhydrite	1499	1529	
Shale & Shells	1529	2380	
Shale & Lime	2380	2570	
Lime	2570	2703	
Shale & Lime	2703	2949	
Lime	2949	3004	
Lime & Shale	3004	3215	
Lime	3215	3262	
Lime & Shale	3262	3380	
Chalky Lime Shale	3380	3660	
Lime & Shale	3660	4750	
Lime	4750	5235	
Lime Iron	5235	5255	
Little Lime Iron	5255	5295	
Lime	5295	5448	
Lime & Shale	5448	5468	
Lim	5468	5735	
Sand & Shale	5735	5765	
Lime	5765	5890	

I certify that this is a true and correct copy of the above log to the best of my knowledge.

RED TIGER DRILLING COMPANY

RECEIVED  
STATE CORPORATION COMMISSION

OCT 30 1961

CONSERVATION DIVISION  
Wichita, Kansas

*George A. Angle*  
George A. Angle

Subscribed and sworn to before me this 20th day of October, 1961.

*Notary Seal*  
Notary Public

My Commission Expires:

11-17-62