


Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
212 No. Market  
Wichita, Kansas

WELL PLUGGING RECORD

Meade County, Sec. 28 Twp. 33S Rge. 29W (E)(W)

Location as "NE/CNW/SW" or footage from lines SW NE SE  
Lease Owner M M & B, Inc.  
Lease Name Feldman Well No. 1  
Office Address 15 Viking Drive, Englewood, Colorado 80110  
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole  
Date well completed August 18, 1966  
Application for plugging filed August 18, 1966  
Application for plugging approved August 18, 1966  
Plugging commenced August 18, 1966  
Plugging completed August 18, 1966  
Reason for abandonment of well or producing formation Non-productive

NORTH

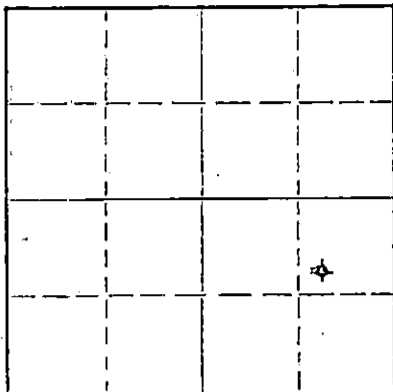

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production None 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Edgar J. Eves  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 5990 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
		0	1500'	8 5/8" S	1500'	None

SEP 12 1966  
9-12-1966  
CONSERVATION DIVISION  
Wichita, Kansas

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method of methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Bottom of hole mudded from 1500 feet to 700 feet. Spotted 35 sacks of cement from 700 feet to 600 feet. Mudded hole from 600 feet to 45 feet. Set plug with hulls and 15 sacks of cement to surface. Cement pumped by Dowell Pump Truck.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Moran Bros Drilling Co  
Address 607 E. Cedar, Liberal, Kansas

STATE OF Colorado, COUNTY OF Arapahoe, ss. CLARK MILLISON (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Clark Mellison  
15 Viking Drive, Englewood, Colorado (Address)

SUBSCRIBED AND SWORN TO before me this 10 day of September, 1966

My commission expires 10-5-69 Notary Public.

# MORAN BROS., INC.

OIL & GAS BUILDING  
 WICHITA FALLS, TEXAS


76301  
 August 26, 1966

RECEIVED  
 STATE CORPORATION COMMISSION  
 SEP 1 1966  
 CONSERVATION DIVISION  
 Wichita, Kansas

M M & B, Inc.  
 Feldman No. 1 Well  
 SW NE SE Sec. 28-33S-29W  
 Meade County, Kansas

Formation

	From	To
Sand & Shale	0'	343'
Shale & Red Bed	343'	885'
Red Bed & Anhy.	885'	1500'
Shale & Red Bed	1500'	1900'
Red Bed & Shale	1900'	2617'
Shale & Lime	2617'	2800'
Lime & Shale	2800'	3285'
Chalky Lime	3285'	3720'
Lime & Shale	3720'	3985'
Shale	3985'	4183'
Shale & Lime	4183'	4525'
Lime & Shale	4525'	4711'
Lime	4711'	5782'
Lime & Sand	5782'	5844'
Lime & Shale	5844'	5990' TD

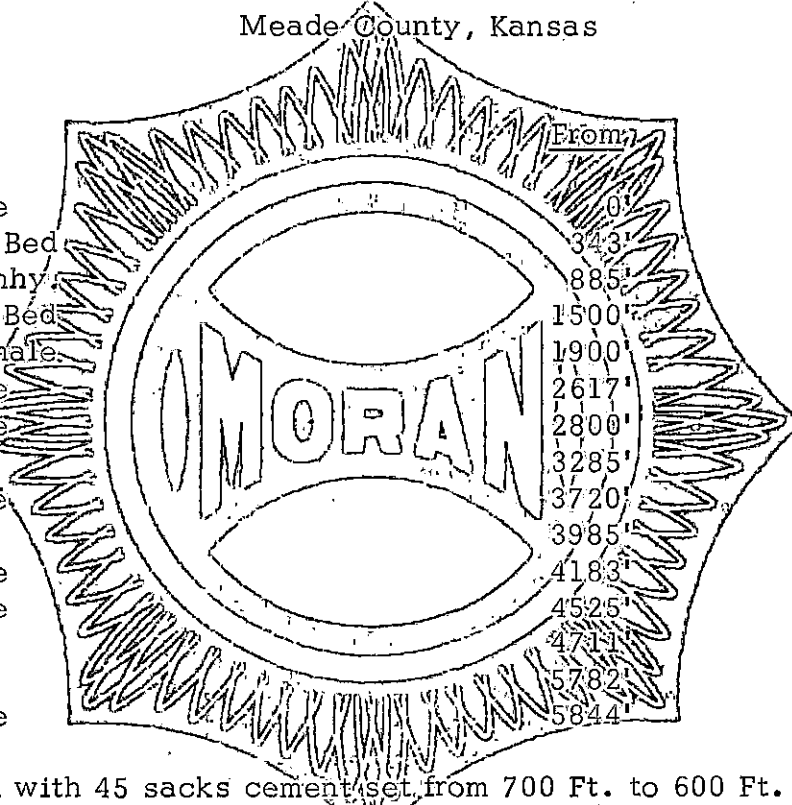

Plugged well with 45 sacks cement set from 700 Ft. to 600 Ft.  
 Set 15 sacks cement plug from 45' to surface.

Certified true and correct

MORAN BROS., INC.

By   
 T. E. Swift

