

STATE OF KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
200 Colorado Derby Building
Wichita, Kansas 67202

FORM CP-1
Rev.03/92

WELL PLUGGING APPLICATION FORM
(PLEASE TYPE FORM and File ONE Copy)

API # 15-175-20990-0000 (Identifier number of this well). This must be listed for wells drilled since 1967; if no API# was issued, indicate spud or completion date.

WELL OPERATOR AMOCO PRODUCTION COMPANY KCC LICENSE # 5952
(owner/company name) (operator's)

ADDRESS P. O. BOX 800 ROOM 925 CITY DENVER

STATE CO ZIP CODE 80201 CONTACT PHONE # (303) 830-5130

LEASE KANSAS UNIV GAS UNIT /D/ WELL# 3 SEC. 5 T. 32 R. 33 (East/West)

- - C - NE SPOT LOCATION/QQQQ COUNTY SEWARD

1250 FEET (in exact footage) FROM S/N (circle one) LINE OF SECTION (NOT Lease Line)

1250 FEET (in exact footage) FROM E/W (circle one) LINE OF SECTION (NOT Lease Line)

Check One: OIL WELL GAS WELL X D&A SWD/ENHR WELL DOCKET#

CONDUCTOR CASING SIZE SET AT CEMENTED WITH SACKS

SURFACE CASING SIZE 8 5/8" SET AT 801 CEMENTED WITH 375 SACKS

PRODUCTION CASING SIZE 5.5." SET AT 2790 CEMENTED WITH 520 SACKS

LIST (ALL) PERFORATIONS and BRIDGEPLUG SETS: 2608-2620, 2636-2660, 2688-2698

ELEVATION 2852 T.D. 2790 PBDT 2736 ANHYDRITE DEPTH
(G.L. (K.B.)) (Stone Corral Formation)

CONDITION OF WELL: GOOD X POOR CASING LEAK JUNK IN HOLE

PROPOSED METHOD OF PLUGGING SEE ATTACHED

(If additional space is needed attach separate page)

IS WELL LOG ATTACHED TO THIS APPLICATION AS REQUIRED? NO IS ACO-1 FILED? YES

If not explain why?

PLUGGING OF THIS WELL WILL BE DONE IN ACCORDANCE WITH K.S.A. 55-101 et. seq. AND THE RULES AND REGULATIONS OF THE STATE CORPORATION COMMISSION.

LIST NAME OF COMPANY REPRESENTATIVE AUTHORIZED TO BE IN CHARGE OF PLUGGING OPERATIONS:

RICHARD JENISCH PHONE# (316) 356-6959

ADDRESS City/State

PLUGGING CONTRACTOR HALLIBURTON KCC LICENSE #
(company name) (contractor's)

ADDRESS PHONE # ()

PROPOSED DATE AND HOUR OF PLUGGING (If Known?)

PAYMENT OF THE PLUGGING FEE (K.A.R. 82-3-118) WILL BE GUARANTEED BY OPERATOR OR AGENT

DATE: 5/11/94 AUTHORIZED OPERATOR/AGENT: Ellen Hartzler
(signature)

RECEIVED
MAY 16 1994
CONSERVATION DIVISION
Wichita, Kansas

1)

Mid-Continent PBU Completion

File: DWB- -400.1

Operating Center Foreman: Kelly Gindlesberger Date: 4/12/94

Type of Operation: Plug and Abandonment

Lease and Well Name: Kansas University "D" No. 3

Field: Hugoton

Formation: Chase

Location: Sec 05, T-32-S, R-33-W, Seward County, Kansas

Elevation: 2852' Ref Pt: KB

TD: 2790' PBD: 2736'


Surface Csg: 8.625", 24# CSA: 801'

Production Csg: 5.5", 15.5# CSA: 2790'

Purpose: To PxA subject well.

WELLBORE SKETCH

PROCEDURE

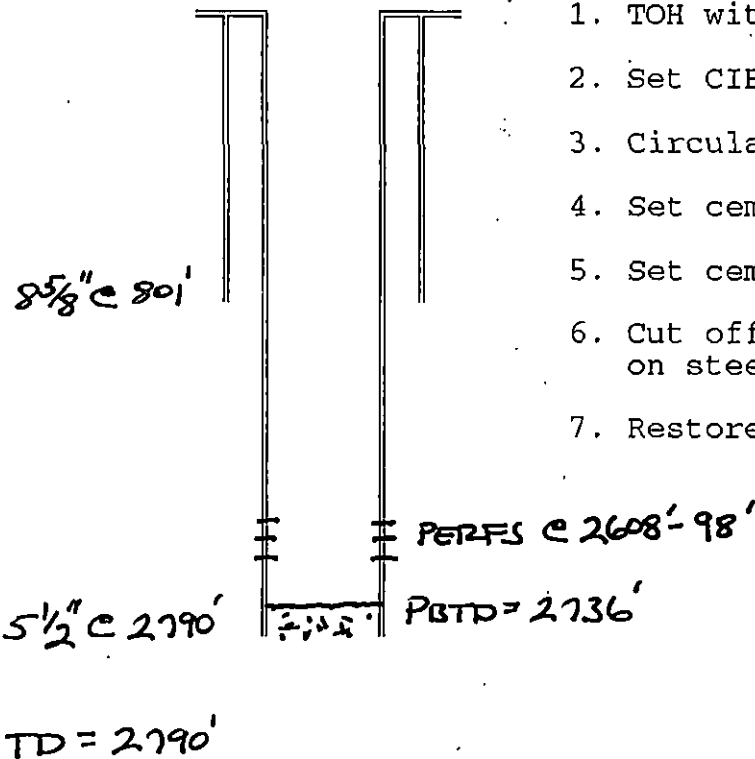

1. TOH with tbg, rods, and pump.
2. Set CIBP with 2 sx cement at 2550'.
3. Circulate hole with 9 ppg mud (36 visc.)
4. Set cement plug from 850' to 450'.
5. Set cement plug from 55'-5'.
6. Cut off casing 5' below ground and weld on steel cap with lease identification.
7. Restore location.

Prepared By: Ed Long

Approved By:

Distribution:

- * Ellen Hartzler - Rm. 925
- K. Gindlesberger - Ulysses
- B. Y. Roundtree - Rm. 927
- R. Jenisch - Ulysses
- J. Doerschlag - Ulysses

* Original to Ellen Hartzler who will send to well file

RECEIVED
STATE CORPORATION COMMISSION

MAY 16 1994

CONSERVATION DIVISION
Wichita, Kansas



Kansas Corporation Commission

Joan Finney, Governor Susan M. Selsam, Chair F.S. Jack Alexander, Commissioner Rachel C. Lipman, Commissioner
Judith McConnell, Executive Director Brian Moline, General Counsel

NOTICE OF RECEIPT OF WELL PLUGGING APPLICATION (CP-1)

May 17, 1994

Amoco Production Company
P O Box 800 Room 925
Denver CO 80201

Kansas Univ Gas Unit D #3
API 15-175-20,990
1250 FNL 1250 FEL
Sec. 05-32S-33W
Seward County

Dear Ms. Ellen Hartzler,

This letter is to notify you that the Conservation Division is in receipt of your plugging proposal, form CP-1, for the above-captioned well.


Your CP-1 has been reviewed by the Conservation Division central office for completeness and to verify license numbers. The plugging proposal will now be forwarded to the district office listed below for review of your proposed method of plugging.

Please contact the district office for approval of your proposed plugging method at least at five (5) days before plugging the well, pursuant to K.A.R. 82-3-113 (b). If a workover pit will be used during the plugging of the well it must be permitted. A CDP-1 form must be filed and approved prior to the use of the pit.

The Conservation Division's review of form CP-1, either in the central or district office, does not include an inquiry into well ownership or the filing operator's legal right to plug the well.

This notice in no way constitutes authorization to plug the above-captioned well by persons not having legal rights of ownership or interest in the well. This notice is void after ninety (90) days from the above date.

Sincerely,


David P. Williams
Production Supervisor

District: #1
304 W. McArtor
Dodge City KS 67801
(316) 225-6760