

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-025-20294-00-00
Spot: CNWSE Sec/Twnshp/Rge: 32-31S-21W
1980 feet from S Section Line, 3300 feet from W Section Line
Lease/Unit Name: VALLENTINE Well Number: 1
County: CLARK Total Vertical Depth: 5310 feet

Operator License No.: 5152
Op Name: BANKS, LEE DBA BANKS OIL CO
Address: 7701 E. KELLOGG SUITE 885
WICHITA, KS 67207

Conductor Pipe: Size feet: \$172.58
Surface Casing: Size 8.625 feet: 649 WITH 350 SX CMT
Production: Size 4.5 feet: 5220 WITH 150 SX CMT
Liner: Size feet:

Well Type: GAS UIC Docket No: Date/Time to Plug: 11/08/2001 8:15 AM
Plug Co. License No.: 5893 Plug Co. Name: PRATT WELL SERVICE, INC.
Proposal Rcvd. from: TOM ROSE Company: PRATT WELL SERVICE, INC. Phone: (620) 672-2531

Proposed Plugging Method: 1ST PLUG AT 1150' WITH 50 SX CMT. 2ND PLUG AT 670' WITH 50 SX CMT. 3RD PLUG AT 40' WITH 10 SX CMT. BRING 10 SX GEL FOR SPACER.

Plugging Proposal Received By: STEVE MIDDLETON Witness Type: Plugging Operations 100% Witnessed (Complete)
Date/Time Plugging Completed: 11/08/2001 10:45 AM KCC Agent: STEVE MIDDLETON

Actual Plugging Report:

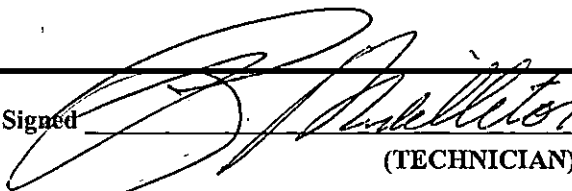
PBTD 5162'. PERFS AT 5090-94'. SAND TO 5000' & 4 SX CMT ON TOP. 1ST PLUG PUMP 10 SX GEL & 40 SX CMT AT 1150'. 2ND PLUG PULL TO 680' & PUMP 50 SX CMT. 3RD PLUG PULL TO 40' AND PUMP 10 SX CMT. STAYED FULL.

Remarks: USED 60/40 POZMIX 6% GEL BY ALLIED. RECOVERED 3333' OF 4 1/2" CASING.

Plugged through: CSG

District: 01

Signed


(TECHNICIAN)

RECEIVED

NOV 09 2001


KCC WICHITA

INVOICED

NOV 08 2001

DATE 11-9-01

INV. NO. 2002060927


Page 2/3