


15-119-2016 RECEIVED  
STATE CORPORATION COMMISSION

NOV 8 1974  
CONSERVATION DIVISION  
Wichita, Kansas FORM CP-4

STATE OF KANSAS  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION  
P. O. BOX 17027  
WICHITA, KANSAS 67217

WELL PLUGGING RECORD

Meade County, Sec. 6 Twp. 33 Rge. 29 (E) (W) X  
Location as "NE/CNW&SW" or footage from lines C NE NE  
Lease Owner Imperial Oil Co. NW  
Lease Name Collingwood Well No. #3  
Office Address Box 784 Great Bend, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole)  
Date well completed 19  
Application for plugging filed 9-20-74 19  
Application for plugging approved 19  
Plugging commenced 10-31-74 19  
Plugging completed 11-6-74 19  
Reason for abandonment of well or producing formation  
If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced?

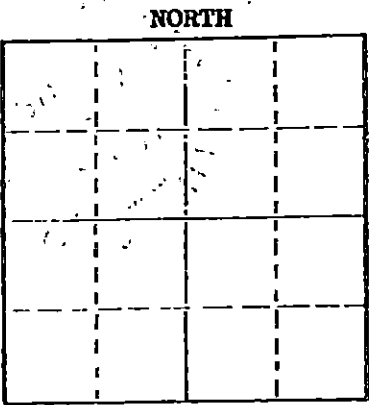

Locate well correctly on above Section Flat

Name of Conservation Agent who supervised plugging of this well Edgar J. Eves  
Producing formation Depth to top Bottom Total Depth of Well 5786' F--  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				5 1/2"	5779'	4044.53'
				8 5/8"	1509'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Pumped 2 sacks hulls - 5 sacks gel and 35 sacks cement - 5700', for bottom hole. Mudded hole to 570' - set 10' rock bridge. Mixed and ran 35 sacks cement thru dump bailer. Mudded hole to 55' - set 10' rock bridge. Mixed and dumped 15 sacks cement to base of cellar.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Southwest Casing Pulling Co.  
Address Box 364 Grea T Bend, Kansas 67530

STATE OF Kansas COUNTY OF Barton ss.  
Southwest Casing Pulling Co. (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) W. C. Spencer Sec.  
Box 364 Great Bend, Kansas  
(Address)

Subscribed and sworn to before me this 7 day of November 19 74

24 October 1976  
Sidney D. Miller  
Notary Public.

