

15-119-10127-0000


STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

Meade County, Sec. 19, Twp. 33, Rge. 29 (E) W (W)
Location as "NE/CNW&SW" or footage from lines NE SE
Lease Owner Panhandle Eastern Pipe Line Company
Lease Name Moller Well No. 2
Office Address P. O. Box 828, Liberal, Kansas 67901
Character of Well (completed as Oil, Gas or Dry Hole) Gas
Date well completed April 6 19 58
Application for plugging filed February 9 19 68
Application for plugging approved February 12 19 68
Plugging commenced February 16 19 68
Plugging completed February 20 19 68
Reason for abandonment of well or producing formation zone was depleted

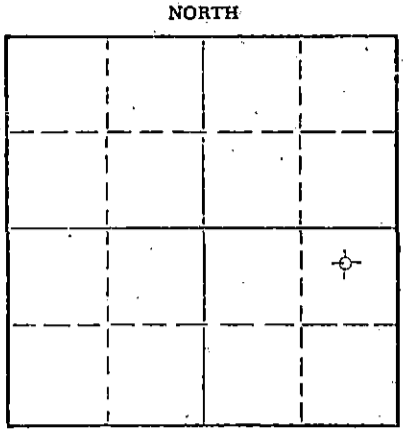

Locate well correctly on above
Section Plat

If a producing well is abandoned, date of last production November 19 67
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Ed Eves
Producing formation Morrow Depth to top 5752 Bottom 5815 Total Depth of Well 6040 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Morrow	Gas	5752	5815	8-5/8"	1617'	0
				5-1/2"	6013'	3464'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Pumped 50 sacks cement down 5-1/2" production string followed by a rubber plug. Rubber plug stopped at 5483'. Shot 5-1/2" casing. Recovered 3464' of casing. Spotted 35 sacks of cement 750'. Spotted 40 sacks at 50'. Welded cap on at 5' below ground level.

RECEIVED
STATE CORPORATION COMMISSION
FEB 23 1968
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Sargent's Casing Pulling Service
Address 402 E. Park, Liberal, Kansas 67901

STATE OF Kansas, COUNTY OF Seward, ss.
Mr. Jack P. Phillippe, Mgr. Drlg. & Prod. (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Jack P. Phillippe
P. O. Box 828, Liberal, Kansas 67901
(Address)

SUBSCRIBED AND SWORN TO before me this 21st day of February, 19 68

My commission expires September 13, 1970

JOAN TAYLOR
Notary Public.