



JOHN ANDERSON, Jr. Governor  
 RICHARD C. BYRD Chairman  
 ALVIN F. GRAUERHOLZ Commissioner  
 HARRY G. WILES Commissioner  
 RAYMOND B. HARVEY Secretary  
 CHARLES C. McCARTER Gen. Counsel

State Corporation Commission

CONSERVATION DIVISION

(Oil, Gas and Water)  
 500 Insurance Bldg. 212 N. Market  
 WICHITA, KANSAS

VERBAL PERMIT FORM  
 (To Be Filed By Plugging Agent)

RECEIVED  
STATE CORPORATION COMMISSION

MAR 15 1963

CONSERVATION DIVISION  
Wichita, Kansas

J. P. Roberts  
 Assistant Director  
 500 Insurance Building  
 212 North Market  
 Wichita 2, Kansas

Dear Sir:

Mr. Wallen of Continental Oil Co. has this

date requested permission to plug the following described well:

Mr. Wallen guarantees payment of the plugging fee.

Operator's full Name: Continental Oil Co.

Complete Address: Drawer 367 Plainville, Kansas

Lease Name: E. Utz Well No. # 1

Location: C SE SW Sec. 19 Twp. 32 Rge. 29 (W)

County Meade Total Depth 5735' Oil Well X

Gas Well    Input Well    SWD Well    D & A    Lost Hole   

Mr. Wallen was instructed to plug the well as follows:

8 5/8" 1675' Circulated w/cement. 4 1/2" 5735' Cemented.

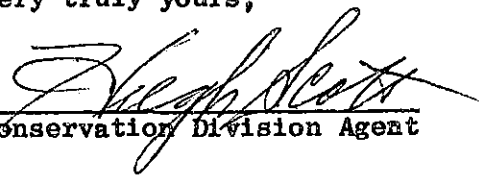
Plug back to 5703' Top perforations 5592'

Mud 5703' to 5200' 35 sax.cement 5200' to 4798'

Mud 4798' to 760' Rock bridge 760' to 750'

35 sax.cement 750' to 650' Mud 650' to 50' Rock bridge 50' to 40'  
15 sax.cement 40' to surface.

Very truly yours,

  
 Conservation Division Agent