



State Corporation Commission

CONSERVATION DIVISION

(Oil, Gas and Water)

500 Insurance Bldg. 212 N. Market
WICHITA, KANSAS 67202

VERBAL PERMIT FORM
(To Be Filed By Plugging Agent)

RECEIVED
STATE CORPORATION COMMISSION

JUN 13 1972

CONSERVATION DIVISION
Wichita, Kansas

J. Lewis Brock
Administrator
500 Insurance Building
Wichita, Kansas 67202

Dear Sir:

Mr. Sargent of Powell has this

date requested permission to plug the following described well:

Mr. Sargent guarantees payment of the plugging fee.

Operator's full Name: Powell & Stone

Complete Address: Box 768, Woodward, Oklahoma 73801

Lease Name: Banker Well No. 1

Location: 135' E of C SE NE Sec. 19 Twp. 33 Rge. 29 ~~(E)~~ (W)

County: Meade Total Depth 5954' Oil Well

Gas Well X Input Well SWD Well D & A Lost Hole

Mr. Sargent was instructed to plug the well as follows:

8 5/8" to 1551' circulated w/ cement. 5 1/2" to 5874' cemented.

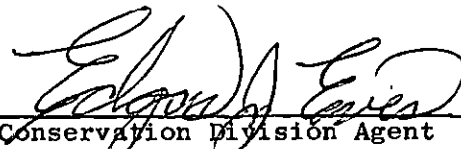
Top perforations 5799' Plug bottom w/ 25 sacks cement.

Top of cement 5600' Mud 5600' to 900'

Spot 35 sacks cement 900' to 800' Mud 800' to 45'

Plug, Hulls & 15 sacks cement 45' to 0'.

Very truly yours,


Conservation Division Agent