

STATE OF KANSAS  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION  
200 Colorado Derby Building  
Wichita, Kansas 67202

FORM CP-1  
Rev. 6/4/84

WELL PLUGGING APPLICATION FORM  
(File One Copy)

API NUMBER 1-30-1950 (of this well)  
(This must be listed; if no API# was issued, please note drilling completion date.)

LEASE OPERATOR Cabot Petroleum Corporation OPERATORS LICENSE NO. 6120 *6/91*

ADDRESS 9400 N. Broadway Suite 608; Oklahoma City, OK 73114 PHONE # (405) 478-6500

LEASE (FARM) Mercer WELL NO. 2 WELL LOCATION 1320' FWL COUNTY Seward

SEC. 21 TWP. 32S RGE. 33W (E) or (W) TOTAL DEPTH 2633' PLUG BACK TD 2577'

Check One:

OIL WELL \_\_\_\_\_ GAS WELL X D & A \_\_\_\_\_ SWD or INJ WELL \_\_\_\_\_ DOCKET NO. \_\_\_\_\_

SURFACE CASING SIZE 10 3/4" SET AT 390' CEMENTED WITH 400 SACKS

CASING SIZE 7" SET AT 2483' CEMENTED WITH 350 SACKS

PERFORATED AT 5 1/2" slotter liner @ 2442.9' to 2577' PBD

CONDITION OF WELL: GOOD XX POOR \_\_\_\_\_ CASING LEAK \_\_\_\_\_ JUNK IN HOLE \_\_\_\_\_

OPERATOR'S SUGGESTED METHOD OF PLUGGING THIS WELL Set 50 sx cmt plug @ 2430'. Load hole w/ fresh wtr gel. Spot 50 sx cmt plug @ 1800' to 1567'. Cut 7" csg @ 800'. Set cmt plug from 800' to 4' below ground level. Cut 10 3/4" csg 4' below GL. Weld plate on 10 3/4". This procedure is as outlined by Steve Durant (If additional space is needed use back of form) w/ the Kansas Corporation Commission.

IS WELL LOG ATTACHED TO THIS APPLICATION AS REQUIRED? No IS ACO-1 FILED? No  
1. No logs were ran on this well (If not, explain) 2. No ACO-1 (completion report) shown in our files.

DATE AND HOUR PLUGGING IS DESIRED TO BEGIN Will notify commission (by telephone) 48 hours prior to plugging well.

PLUGGING OF THIS WELL WILL BE DONE IN ACCORDANCE WITH K.S.A. 55-101 et seq AND THE RULES AND REGULATIONS OF THE STATE CORPORATION COMMISSION.

NAME OF COMPANY REPRESENTATIVE AUTHORIZED TO BE IN CHARGE OF PLUGGING OPERATIONS:

Jim Pendergrass PHONE # (405) 478-6514

ADDRESS Same as above operator.

PLUGGING CONTRACTOR Sargents Casing Pulling Service LICENSE NO. 6547 *7/90*

ADDRESS 920 S. Lincoln, Liberal, Kansas PHONE # (316) 624-7455 *6/91*

PAYMENT WILL BE GUARANTEED BY OPERATOR OR AGENT SIGNED: Jan Newton - Engineer  
(Operator or Agent)

DATE: February 14, 1990

RECEIVED  
FEB 21 1990  
CONSERVATION DIVISION  
Wichita, Kansas




Mercer #2  
Sec 21-32S-33W  
Seward Co, KS

GL 2738'

Spud 12-31-49

4" Orbit Valve @ Wellhead.

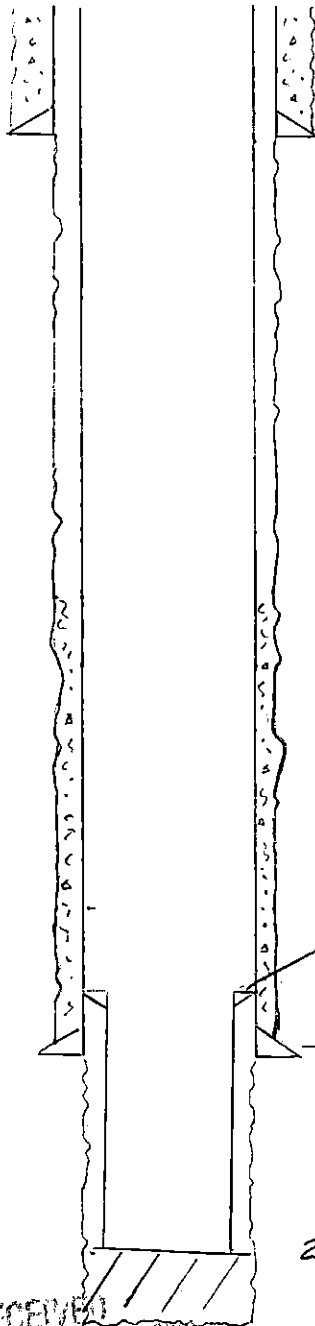

10 3/4" H-40 32.75 # 8 rd csg @ 390'  
Cmt w/400 sx

17 1/4" hole to 411'

10-21-86  
RAN 5 1/2" 134.1' slotted liner. Set @ 2442.9'

7" H-40 20 # 8 rd csg set @ 2483'  
Cmt w/350 sx

9" hole to 2496'

2577' PBTD

RECEIVED  
STATE CORPORATION COMMISSION  
FEB 21 1990  
2638' TD

CONSERVATION DIVISION  
Wichita, Kansas

Completed Open hole w/cable tool 6 1/4" hole



Kansas Corporation Commission

MIKE HAYDEN GOVERNOR  
KEITH R. HENLEY CHAIRMAN  
RICH KOWALEWSKI COMMISSIONER  
JACK SHRIVER COMMISSIONER  
JUDITH MCCONNELL EXECUTIVE DIRECTOR  
FRANK A. CARO, JR. GENERAL COUNSEL

CONSERVATION DIVISION  
SHARI FEIST ALBRECHT, DIRECTOR  
200 Colorado Derby Bldg.  
202 W. 1st Street  
Wichita, KS 67202-1286  
(316) 263-3238

NOTICE OF RECEIPT OF  
WELL PLUGGING APPLICATION

July 23, 1990

Cabot Petroleum Corporation  
9400 N. Broadway, Suite 608  
Oklahoma City, OK 73114

Mercer #2  
1650'FNL-1320'FWL 21-32-33W  
Seward County, KS

Gentlemen:

This letter is to notify you that the Conservation Division is in receipt of your plugging proposal, form CP-1, for the above-captioned well.

Your CP-1 has been reviewed by the Conservation Division central office for completeness and to verify license numbers. The plugging proposal will now be forwarded to the district office listed below for review of your proposed method of plugging. Please contact the district office for approval of your proposed plugging method at least five (5) days before plugging the well, pursuant to K.A.R. 82-3-113(b). Failure to do so is punishable by an administrative penalty of up to \$1000.

It has recently come to my attention that the form CP-1 has been filed by operators other than the owner or operator of the well and without the consent of the owner or operator. The Conservation Division's review of form CP-1, either in the central or district office, does not include an inquiry into well ownership or the filing operator's legal right to plug the well.

**This notice in no way constitutes authorization to plug the above-captioned well by persons not having legal rights of ownership or interest in the well. This notice is void after ninety (90) days from the above date.**

Sincerely,

*David P. Williams*

David P. Williams  
Production Supervisor

District: #1, 304 W. McArtor  
Dodge City, KS 67801  
(316) 225 - 6760