

15-119-10120-0000

STATE OF KANSAS
STATE CORPORATION COMMISSION


Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission

WELL PLUGGING RECORD

P. O. Box 17027
Wichita, Kansas 67217
NORTH

Meade County, Sec. 11 Twp. 33 Rge. 28 (E) (W) X
Location as "NE/CNW/SE/SW" or footage from lines C of NW
Lease Owner A. L. Abercrombie Inc.
Lease Name Wiens Well No. #1
Office Address Oil Center South, Great Bend, Kansas
Character of Well (completed as Oil, Gas or Dry Hole)
Date well completed 19
Application for plugging filed 19
Application for plugging approved 19
Plugging commenced 12-13-72 19
Plugging completed 12-18-72 19
Reason for abandonment of well or producing formation



Locate well correctly on above Section Plot

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced?

Name of Conservation Agent who supervised plugging of this well Edgar J. Eves
Producing formation Depth to top Bottom Total Depth of Well 5804' Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				4 1/2"	5801'	2813.10'
				8 5/8"	1204'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Made bottom hole plug back with sand to 3725'. Mixed and ran 3 sacks cement thru dump bailer.
Mudded hole to 600' - set 25' rock bridge. Mixed and ran 35 sacks cement thru dump bailer. Mudded hole to 40', set 10' rock bridge. Mixed and dumped 10 sacks cement to base of cellar.


RECEIVED
STATE CORPORATION COMMISSION
DEC 22 1972
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Southwest Casing Pulling Co.
Address Box 364 Great Bend, Kansas

STATE OF Kansas COUNTY OF Barton, ss.
Southwest Casing Pulling Co. (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) W. C. Spencer Sec.
Box 364 Great Bend, Kansas (Address)

Subscribed and sworn to before me this 21 day of December, 19 72

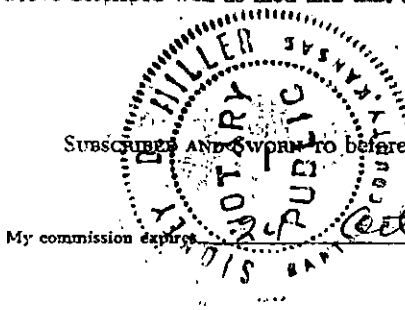

Sidney D. Miller
Notary Public.

Wiens No. 1
C NW/4 Sec. 11-33-28
Meade County, Kansas
COMPANY: Panhandle Development Co., Inc.
Wichita, Kansas

Well commenced 10/10/62
4 1/2" casing cemented @
5801' KB. w/ 75 sxs light
wt. and 50 sxs common -2%
gel. 10/27/62

FORMATION LOG

Soil & clay	0	-	-	75
Sand, shale & red bed	75	-	-	635
Red Bed & shells	635	-	-	1,075
Red Bed & Anhy.	1,075	-	-	1,212
Anhy. & shale	1,212	-	-	1,225
Red Bed & shale	1,225	-	-	1,825
Shale & Anhy. shells	1,825	-	-	2,160
Shale & lime	2,160	-	-	2,345
Lime & shale	2,345	-	-	2,765
Lime	2,765	-	-	2,865
Lime & shale	2,865	-	-	3,065
Lime	3,065	-	-	3,160
Lime & shale	3,160	-	-	3,470
Lime w/ chalk	3,470	-	-	3,581
Lime, shale & chert	3,581	-	-	3,695
Lime & shale	3,695	-	-	4,629
Lime	4,629	-	-	5,145
Shale	5,145	-	-	5,185
Lime	5,185	-	-	5,325
Shale	5,325	-	-	5,400
Lime	5,400	-	-	5,800
Total Depth	5,800			

RECEIVED
STATE CORPORATION COMMISSION
OCT 18 1972
CONSERVATION DIVISION
Wichita, Kansas

This is a true and exact copy of the formation, taken from
The Daily Drilling Reports.

MAHONEY DRILLING COMPANY, INC.

T. W. Mahoney
T. W. Mahoney, President

STATE OF KANSAS
COUNTY OF SEWARD

Sworn to before me this 29th day of October, 1962.

My Commission Expires:
10/20/63

Arcton Buffington
Notary Public