

15-119-10152-0000

State of Kansas



State Corporation Commission

CONSERVATION DIVISION

(Oil, Gas and Water)
500 Insurance Bldg. 212 N. Market
WICHITA, KANSAS 67202

VERBAL PERMIT FORM (To Be Filed By Plugging Agent)

RECEIVED
STATE CORPORATION COMMISSION

MAY 26 1972

CONSERVATION DIVISION
Wichita, Kansas

J. Lewis Brock
Administrator
500 Insurance Building
Wichita, Kansas 67202

Dear Sir:

Mr. Brown of Shamrock has this

date requested permission to plug the following described well:

Mr. Brown guarantees payment of the plugging fee.

Operator's full Name: Diamond Shamrock Corporation

Complete Address: Box 631, Amarillo, Texas

Lease Name: Fletcher Well No. 4

Location: C NE NE Sec. 12 Twp. 33 Rge. 29 ~~(E)~~ (W)

County: Meade Total Depth 5810' Oil Well

Gas Well Input Well SWD Well D & A Lost Hole

Mr. Brown was instructed to plug the well as follows:

9 5/8" to 1534' circulated w/ cement. 4 1/2" to 5640' cemented.

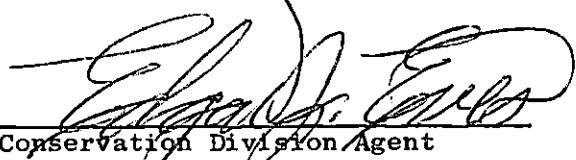
Top perforations 5578' Plug bottom w/ 20 sacks cement.

Top of cement 5350' Mud 5350' to 900'

Spot 35 sacks cement 900' to 800' Mud 800' to 45'

Plug, Hulls & 15 sacks cement 45' to 0'.

Very truly yours,


Conservation Division Agent