


Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
11 No. Broadway  
Wichita, Kansas

### WELL PLUGGING RECORD

NORTH



Locate well correctly on above  
Section Plat

Pratt County, Sec. 21 Twp. 28S Rge. 12W (X) (W)  
Location as "NE/CNW/SW" or footage from lines. C NW SE  
Lease Owner Price Exploration Company  
Lease Name Hayes Well No. 1  
Office Address 404 Oil Capitol Building, Tulsa, Oklahoma  
Character of Well (completed as Oil, Gas or Dry Hole) \_\_\_\_\_  
Date well completed \_\_\_\_\_ 19\_\_\_\_  
Application for plugging filed 5-23-67 19\_\_\_\_  
Application for plugging approved 5-21-67 19\_\_\_\_  
Plugging commenced 5-21-67 19\_\_\_\_  
Plugging completed 5-21-67 19\_\_\_\_  
Reason for abandonment of well or producing formation Dry hole.

If a producing well is abandoned, date of last production \_\_\_\_\_ 19\_\_\_\_  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes, orally

Name of Conservation Agent who supervised plugging of this well \_\_\_\_\_  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 4498 Feet  
Show depth and thickness of all water, oil and gas formations.


#### OIL, GAS OR WATER RECORDS

#### CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	366'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Heavy mud to 325'  
Set plug and 30 sacks cement  
Mud to 40'  
Set plug and 10 sacks cement

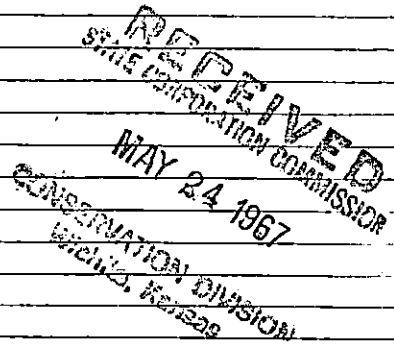

(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor Bowers Drilling Company, Inc.  
Address 1434 Wichita Plaza, Wichita, Kansas 67202

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.  
Emil E. Bowers (employee of ~~owner~~) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Emil E. Bowers  
1434 Wichita Plaza, Wichita, Kansas  
(Address)

SUBSCRIBED AND SWORN to before me this 23rd day of May, 1967

Elaine L. Winter  
Notary Public.

My commission expires May 5, 1970.

WELL LOG

COMPANY: Price Exploration Company  
 CONTRACTOR: Bowers Drilling Company, Inc.  
 FARM: #1 Hayes  
 LOCATION: C NW SE Section 21-28S-12W  
 Pratt County, Kansas  
 COMMENCED: 5-3-67  
 COMPLETED: 5-21-67  
 ELEVATION: 1885 Kelly Bushing

0 - 235	Soil and Sand	
235 - 1300	Red Bed	Set 8-5/8" at 366' W/350 sx.
1300 - 1900	Shale and Shells	
1900 - 2375	Shale and Lime	
2375 - 2600	Shale	
2600 - 3300	Lime and Shale	
3300 - 3485	Lime	
3485 - 3610	Lime and Shale	
3610 - 3731	Shale and Sand	
3731 - 3870	Lime	
3870 - 3980	Lime and Shale	
3980 - 4040	Lime	
4040 - 4100	Lime and Shale	
4100 - 4134	Lime	
4134 - 4222	Lime and Shale	
4222 - 4280	Lime and Chert	
4280 - 4350	Shale	
4350 - 4460	Lime	
4460 - 4469	Lime and Shale	
4469 - 4484	Sand	
4484 - 4498	Sand and Shale	
4498	T.D.	D & A

LOG TOPS

RECEIVED  
 STATE CORPORATION COMMISSION  
 MAY 24 1967  
 CONSERVATION DIVISION  
 Wichita, Kansas

STATE OF KANSAS        )  
                               ) SS  
 COUNTY OF SEDGWICK    )

I, Emil E. Bowers, do hereby certify that the above and foregoing is a true and correct copy of the log of the #1 Hayes located C NW SE of Section 21-28S-12W Pratt County, Kansas, as reflected by the files of Bowers Drilling Company, Inc.

*Emil E. Bowers*

Subscribed and sworn to before me, a Notary Public, in and for Sedgwick County, Kansas, this 22nd day of May, 1967.

*Elaine L. Winter*

My commission expires May 5, 1970.