


STATE OF KANSAS  
STATE CORPORATION COMMISSION

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
212 No. Market  
Wichita, Kansas 67202

WELL PLUGGING RECORD

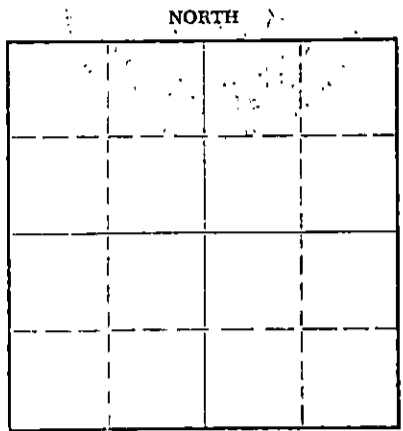

Locate well correctly on above  
Section Plat

Pratt County, Sec. 22 Twp. 28 Rge. 12 (E) (W)  
Location as "NE/CNW/SW" or footage from lines NE NE SW  
Lease Owner Raymond Oil Co., Inc.  
Lease Name Chitwood H#2 Well No. \_\_\_\_\_  
Office Address Wichita, Kansas 67202  
Character of Well (completed as Oil, Gas or Dry Hole) \_\_\_\_\_  
Date well completed \_\_\_\_\_ 19\_\_\_\_  
Application for plugging filed \_\_\_\_\_ 19\_\_\_\_  
Application for plugging approved \_\_\_\_\_ 19\_\_\_\_  
Plugging commenced 2/6/70 \_\_\_\_\_ 19\_\_\_\_  
Plugging completed 2/10/70 \_\_\_\_\_ 19\_\_\_\_  
Reason for abandonment of well or producing formation depleted  
If a producing well is abandoned, date of last production \_\_\_\_\_ 19\_\_\_\_  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Biberstein  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 4417' Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				10-3/4	350	none
				5 1/2	4399'	2678'
RECEIVED STATE CORPORATION COMMISSION FEB 18 1970 CONSERVATION DIVISION WICHITA, KANSAS						

Describe in detail the manner in which the well was plugged indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Checked hole to 4417', ran sand to 4375' and ran 5 sacks of cement.  
Loaded hole with water, shot pipe at 2833', pumped load water at 600 lb. pressure, pumped 40 barrels oil and 2 loads water, pressure dropped to 300 lb. Shot pipe at 2740', worked pipe to 25" tension. Shot pipe at 2677', worked pipe loose and pulled 86 joints. Bailed hole to 250', set 10' rock bridge and ran 35 sacks of cement. Mudded to 40', set 10' rock bridge and ran 15 sacks of cement. Talled pipe.


PLUGGING COMPLETE.

(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor KNIGHT CASING PULLING CO., INC.  
Address CHASE, KANSAS

STATE OF KANSAS COUNTY OF RICE, ss.  
NOEL J. KNIGHT (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Signature]  
CHASE, KANSAS  
(Address)



Subscribed and Sworn to before me this 11th day of February, 19 70  
My commission expires 2/15/71  
[Signature] Notary Public.