


15-129-20827-0000

WELL PLUGGING RECORD

Give All Information Completely
 Make Required Affidavit

COUNTY Morton SEC. 23 TWP. 31S RGE. 41 E/W
 Location as in quarters or footage from lines:
330' FSL & 660' FEL

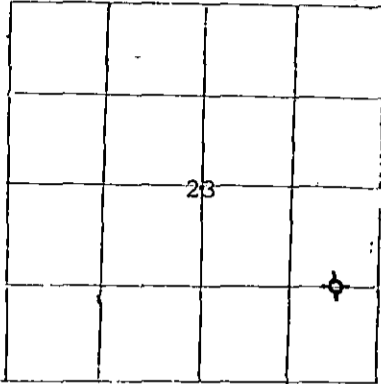

Locate Well
 correctly on above
 Section Platt.

Lease Owner J. M. Huber Corporation
 Lease Name A.H.H. Well No. 23-1
 Office Address 7120 I-40 West, Suite, 232, Amarillo, TX 79106
 Character of Well (Completed as Oil, Gas or Dry Hole): Dry Hole
 Date Well Completed 10-15-86
 Application for plugging filed 10-15-86 (verbal w/Steve Durant)
 Plugging commenced 10-15-86 10:30 a.m.
 Plugging completed 10-15-86
 Reason for abandonment of well or producing formation Dry Hole

Was permission obtained from the Conservation Division or it's
 Agent's before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Glen Barlow
 Producing formation None Depth to top bottom T.D. 5500'
 Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

Casing Record

Formation	Content	From	To	Size	Put in	Pulled Out
				9-5/8"	1625'	None

Describe in detail the manner in which the well was plugged, indicating where the mud
 fluid was placed and the method or methods used in introducing it into the hold. If cement
 or other plugs were used, state the character of same and depth placed, from feet
 to feet for each plug set.

Plug well w/190 sx 60/40/2 Pozmix w/2% CaCl2 as follows:
 THH w/DP open-ended - 1st plug 60 sx @ 4950-4850'
 2nd plug 50 sx @ 1650-1550'
 3rd plug 50 sx @ 750-650'
 4th plug 10 sx @ 40-0' (w/wooden plug & CS hulls)
 10 sx mouse hole
 10 sx rat hole

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Unit Drilling Company (#09137)
P. O. Box 702500, Tulsa, Oklahoma 74170-2500


STATE OF Texas COUNTY OF Potter, ss.
William D. Siddens (employee of owner) or ~~(owner or operator)~~ of the
 above-described well, being first duly sworn on oath, says: That I have knowledge of the
 facts, statements, and matters herein contained and the log of the above-described well as
 filed and that the same are true and correct. So help me God.

(Signature) William D. Siddens

7120 I-40 West, Suite 232, Amarillo, TX
 (Address) 79106

SUBSCRIBED AND SWORN TO before me this 17th day of October, 19 86

My Commission Expires: 6-26-89



Denise L. Barnett
 Notary Public.

10-20-86
 OCT 20 1986