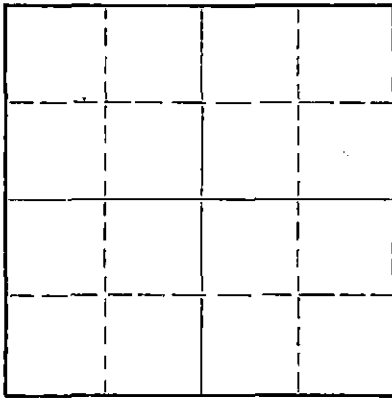


Give Corporation Completely
Made Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bittling Building
Wichita, Kansas

15-129-00526-0000
WELL PLUGGING RECORD

NORTH

Locate well correctly on above
Section Plat

Morton County, Sec. 24 Twp. 31 Rge. 41 (X) W (W)
Location as "NE/CNW/SW" or footage from lines C SE/4
Lease Owner Michaelis Drilling Co.
Lease Name Wires Well No. 1
Office Address 1019 East Second St.
Character of Well (completed as Oil, Gas or Dry Hole) gas - dry hole
Date well completed 9-21-55 19
Application for plugging filed 9-27-55 19
Application for plugging approved 9-28-55 19
Plugging commenced 10-5-55 19
Plugging completed 10-5-55 19
Reason for abandonment of well or producing formation No production

If a producing well is abandoned, date of last production none 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Merle Rives

Producing formation Chase Group Depth to top 2206 Bottom 2246 Total Depth of Well 2272 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Shale & Sand	Water	0	477	8-5/8	6-2-55	Cement circulated

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Filled with mud to 475 feet, set rock bridge,

dumped 20 sacks cement, top of cement 405 ft.

Filled with mud to 35 ft., set rock bridge,

dumped 10 sacks cement for cap.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Earl Miller (License #11)

Address Great Bend, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.

W. A. Michaelis, Jr. (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature)


1019 East Second St., Wichita, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 14th day of October, 19 55

My commission expires 11-7-57

Mary L. Barnes

Notary Public.

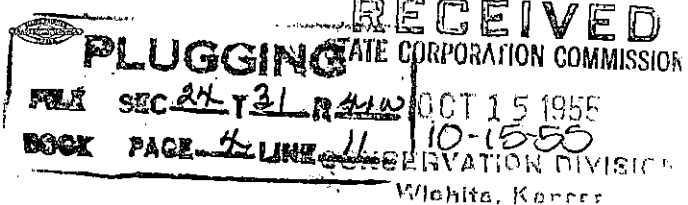

WIRES #1

15-129-00526-0000

Commenced: June 1, 1955

Completed: June 6, 1955
(rotary)

Well Record

Location: Sec. 24-31S-41W,
Morton County, Kans.

Operator: Michaelis Drilling Company
1019 East Second Street
Wichita 7, Kansas

Contractor: Michaelis Drilling Company
1019 East Second Street
Wichita 7, Kansas

Casing Record: 8-5/8" @ 471.41' w/ 300 sacks cement
5-1/2" @ 2271' w/ 200 sacks cement

L O G

Sand & clay	200
Hard sand	228
Red sandy shale	270
Red bed & sand	478
Red bed	642
Gyp	705
Red bed	1065
Gyp & red bed	1133
Sand	1499
Gyp	1550
Red bed & gyp	1935
Shale & red bed	2211
Red bed & sand	2272 RTD
Top of Herrington	2183
Top of Krider	2194
Top of Winfield	2233

STATE OF KANSAS)

COUNTY OF SEDGWICK)

The undersigned, Michaelis Drilling Company, hereby certifies that the above log is a true and correct log of the formations encountered in drilling the above well as reflected by the Daily Drilling Report.

MICHAELIS DRILLING COMPANY

By John L. James
John L. James
Geologist.

Subscribed and sworn to before me this
14th day of June, 1955.

Mary L. Barnes
Mary L. Barnes, Notary Public.
My comm. expires 11/7/57

RECEIVED
STATE CORPORATION COMMISSION
PLUGGING
FILE SEC 24 T 31 R 41W
BOOK PAGE 4 LINE 11