


15-119-20437-0000

STATE OF KANSAS  
STATE CORPORATION COMMISSION

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
211 No. Broadway  
Wichita, Kansas

WELL PLUGGING RECORD

Meade County. Sec. 6 Twp. 33S Rge. 18 (#) (W)  
Location as "NE/CNW/SW" or footage from lines 400' N of C. SE 1/4  
Lease Owner Anadarko Production Company  
Lease Name Harris Well No. "B" 1-6  
Office Address Box 351, Liberal, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole) Dry  
Date well completed April 16 1960  
Application for plugging filed April 16 1960  
Application for plugging approved April 16 1960  
Plugging commenced April 16 1960  
Plugging completed April 17 1960  
Reason for abandonment of well or producing formation Dry

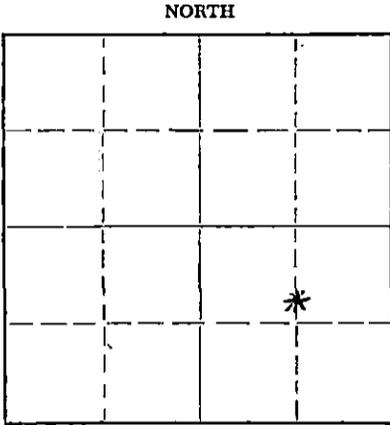

Locate well correctly on above  
Section Plat

If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Bill Lachamp  
Producing formation None Depth to top Bottom Total Depth of Well 5723 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	1519	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Spotted 25 sacks cement from 1520 to 1455, filled with mud to 400 feet, spotted 25 sacks from 400 to 325, filled with mud to 75 feet of top, drove wooden plug down to top of mud, pumped 25 sacks cement on top of plug, cut off casing 5 feet below ground and welded on cap.

RECEIVED  
STATE CORPORATION COMMISSION

MAY 4 1960

CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Fleet Drilling Company  
Address

STATE OF Kansas, COUNTY OF Seward, ss.  
Anadarko Production Company (employee-of-owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) R. L. Shields Manager Drilling & Production

Box 351, Liberal, Kansas (Address)

SUBSCRIBED AND SWORN TO before me this 27th day of April, 1960

My Commission Expires December 8, 1963

My commission expires

Patricia J. Jackson Notary Public.



