

STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

WELL PLUGGING RECORD

Kingman County, Sec. 32 Twp. 30S Rge. 6 (W)

Location as "NE/CNW%SW%" or footage from lines C SE NE
Lease Owner Theodore R. Ferguson
Lease Name Reida Well No. 1
Office Address 1525 Wichita Plaza Bldg., Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) dry hole
Date well completed August 30, 1967
Application for plugging filed September 1, 1967
Application for plugging approved 19
Plugging commenced August 30, 1967
Plugging completed August 30, 1967
Reason for abandonment of well or producing formation dry hole

NORTH

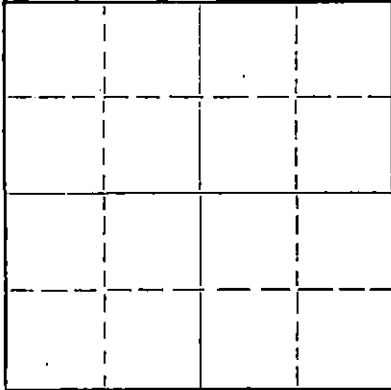

Locate well correctly on above
Section Plat

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Archie Elving
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4730 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Surface Pipe		-0-	245	8-5/8"	8/17/67	none

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Set Bottom Plug @ 240' w/25 sacks cement,
Set Top Plug @ 40' w/10 sacks cement,
2 sacks cement in Rathole.

RECEIVED
STATE CORPORATION COMMISSION
SEP 5 1967
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor E. K. Edmiston Drilling Co., Inc.
Address 425 First National Bank Building, Wichita, Kansas 67202


STATE OF KANSAS, COUNTY OF SEDGWICK, ss.
E. K. Edmiston (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Signature]
425 First Natl Bank Bldg., Wichita, Ks.
(Address)

Subscribed and Sworn to before me this 1st day of September, 19 67

Notary Public
November 9, 1969

Marilyn E. Fox
Notary Public



DRILLER'S LOG

OPERATOR: Theodore R. Ferguson
 1525 Wichita Plaza Building,
 Wichita, Kansas 67202

ROTARY DRILLING COMMENCED: August 17, 1967

ROTARY DRILLING COMPLETED: August 30, 1967

WELL NAME: REIDA No. 1

LOCATION: C SE NE Sec. 32-30S-6W
 Kingman County, Kansas

CONTRACTOR: E. K. Edmiston Drilling Co., Inc.
 425 First National Bank Building,
 Wichita, Kansas 67202

CASING RECORD: 245' of 8-5/8" surface pipe with
 180 sacks cement


RECEIVED
 STATE CORPORATION COMMISSION
 SEP 5 1967
 CONSERVATION DIVISION
 Wichita, Kansas

L O G

Measurements from top of Kelly Bushing


Sand	0 -	30	
Red Bed and Shells		245	
Red Rock and Shale		1130	
Lime and Shale Streaks		1500	
Lime and Shale		2538	
Shale and Lime Streaks		3010	
Lime and Shale		3173	
Lime and Shale Streaks		3300	
Lime		4320	
Chert		4345	
Lime		4583	
Lime and Shale		4712	
Simpson		4730	R.T.D.


The undersigned, E. K. Edmiston, President of E. K. Edmiston Drilling Co., Inc., hereby certifies on behalf of said company, that the above log is a true and correct log of the formations encountered in drilling the above well, as reflected by the daily drilling reports.

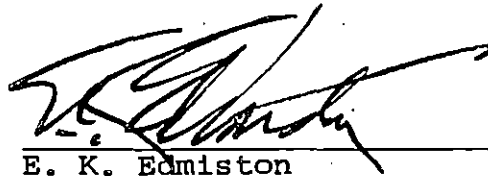
 E. K. Edmiston

STATE OF KANSAS)
) SS:
 COUNTY OF SEDGWICK)

BE IT REMEMBERED that on this 1st day of September, 1967, before me, the undersigned, a Notary Public within and for the County and State aforesaid, came E. K. EDMISTON, known to me to be the same person who executed the foregoing instrument on behalf of E. K. Edmiston Drilling Co., Inc., and he duly acknowledged the execution of the same for himself and for said company. IN WITNESS WHEREOF, I have hereunto set my hand and official seal on the day and year last above written.




 Marilyn E. Fox, Notary Public