


STATE OF KANSAS  
 STATE CORPORATION COMMISSION  
 CONSERVATION DIVISION  
 P. O. BOX 17027  
 WICHITA, KANSAS 67217

FORM CP-4

WELL PLUGGING RECORD

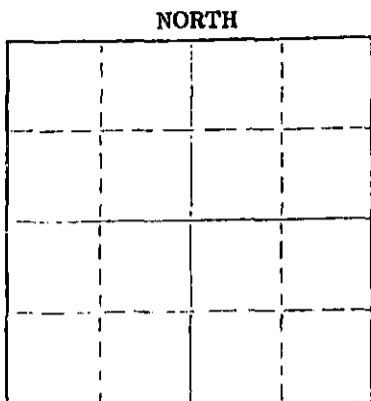

Locate well correctly on above Section Plat

Kingman County. Sec. 14 Twp. 30S Rge. (E) 7 (W)  
 Location as "NE/CNW&SW" or footage from lines SW SW NW  
 Lease Owner Oil Property Management, Inc.  
 Lease Name Kinert Well No. A-1  
 Office Address 300 Insurance Building - Wichita, Kansas 67202  
 Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole  
 Date well completed August 19, 1976  
 Application for plugging filed August 19, 1976  
 Application for plugging approved August 19, 1976  
 Plugging commenced August 19, 1976  
 Plugging completed August 19, 1976  
 Reason for abandonment of well or producing formation dry hole

If a producing well is abandoned, date of last production 19  
 Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well George Russell Bieberstein  
 Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 3736 Feet  
 Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
	Surface Casing	0	260'	8 5/8"	260'	none

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Plug to 250 feet with 35 sacks cement,  
plug to 40' with 15 sacks cement,  
5 sacks cement in rat hole,  
Job completed at 11:00A.M. August 19, 1976.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Search Drilling Company  
 Address Wichita, Kansas

STATE OF Kansas COUNTY OF Sedgwick, ss.  
 \_\_\_\_\_ (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) B. M. Wendling  
Wichita, Kansas (Address)

Subscribed and sworn to before me this 19th day of August, 1976

My commission expires February 19, 1977  
Maxine Dressen Notary Public.

MAXINE DRESSEN  
 NOTARY PUBLIC  
 SEDGWICK COUNTY, KANSAS  
 MY COMM. EXP. FEB. 19, 1977

RECEIVED  
 STATE CORPORATION COMMISSION  
 AUG 23 1976  
 CONSERVATION DIVISION  
 Wichita, Kansas

DRILLERS LOG

KINERT A-1

<u>CASING RECORD:</u> 8 /58" set at 260' with 275 sacks cement	<u>OPERATOR:</u> Oil Property Management, Inc.	<u>DESCRIPTION:</u> SW SW NW, Section 14-30S-7W Kingman County, Kansas
<u>TOTAL DEPTH:</u> 3736'	<u>CONTRACTOR:</u> Search Drilling Company	
	<u>COMMENCED:</u> August 12, 1976	
	<u>COMPLETED:</u> August 19, 1976	

<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>	<u>REMARKS</u>
Sand	0	70	
Clay and Red Bed	70	270	
Red Bed	270	694	
Red Bed and Shale	694	985	
Anhydrite	985	998	
Shale and Lime	998	1635	
Lime and Shale	1635	2186	
Shale and Lime	2186	2445	
Lime and Shale	2445	2836	
Shale and Lime	2836	3033	
Lime and Shale	3033	3736	
Total depth	3736		

D & A

I certify that this is a true and correct copy of the above log to the best of my knowledge

SEARCH DRILLING COMPANY

R. M. Wendling  
R. M. Wendling

Subscribed and sworn to before me this 19th day of August, 1976.

My commission expires:  
February 19, 1976

Maxine Dressen  
Maxine Dressen

RECEIVED  
JULY CORPORATION COMMISSION  
AUG 23 1976  
Notary Public  
Wichita, Kansas

MAXINE DRESSEN  
NOTARY PUBLIC  
SEDGWICK COUNTY, KANSAS  
MY COMM. EXP. FEB. 19, 1977