


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 North Market, Insurance Bldg.
Wichita, Kansas

Kingman County, Sec. 9 Twp. 30S Rge. (E) 7 (W)

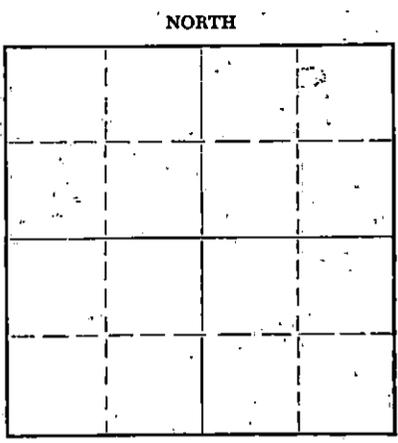

Location as "NE/CNW/SW" or footage from lines NE NE NW
Lease Owner Pickrell Drilling Company
Lease Name Johnson Well No. 1
Office Address 705 Fourth National Bank Bldg., Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed August 5 19 61
Application for plugging filed August 5 19 61
Application for plugging approved August 5 19 61
Plugging commenced August 5 19 61
Plugging completed August 5 19 61
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Fred W. Hampel, Pretty Prairie, Ks.
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4225 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	505'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Heavy mud to 300'. Set Plug. Cemented with 15 sacks cement. Heavy mud to 35' Set plug. Cemented with 10 sacks cement to bottom of cellar. Plugged rat hole with 2 sacks cement.

RECEIVED
STATE CORPORATION COMMISSION
AUG 9 1961
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Pickrell Drilling Company
Address 705 Fourth National Bank Bldg., Wichita 2, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.
C. W. Sebitts (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) C. W. Sebitts
705 Fourth National Bank Bldg.
(Address)

SUBSCRIBED AND SWORN to before me this 7th day of August, 19 61

My commission expires August 13, 1961
Ruth Sullivan Notary Public.

ROTARY DRILLING LOG

COMPANY: Pickrell Drilling Company
705 Fourth National Bank Bldg.
Wichita 2, Kansas
LOCATION: JOHNSON #1 - NE NE NW, Sec. 9-30S-7W
Kingman County, Kansas

Rotary Drilling Commenced 7/24/61
Rotary Drilling Completed 8/5/61

CONTRACTOR: **PICKRELL DRILLING COMPANY**
Wichita, Kansas

CASING RECORD: 505' (11 jts.) 8 5/8" 20# Surface Casing with 275 sacks cement.
Circulated. No oil string run. D & A.

LOG

(Figures indicate bottom of formation — measurements from top of rotary bushing.)

40'	Sand & Clay
505'	Red Rock
925'	Shale & Shells
1235'	Shale & Lime
1728'	Lime
3028'	Lime & Shale
3366'	Sand, Shale & Lime
3761'	Lime
4125'	Lime & Shale
4225'	Mississippi T.D.

Circulated for Samples

4090'
4105'
4115'
4141'
4150'
4155'
4185'
4200'
4225'

Slope Test

1595'	0°
2345'	0°
3366'	0°
4000'	0°

S. L. M.

1728'
3366'
4085'

RECEIVED
STATE CORPORATION COMMISSION
AUG 9 1961
CONSERVATION DIVISION
Wichita, Kansas

The undersigned, C. W. Sebitts, Attorney-in-Fact for PICKRELL DRILLING COMPANY, hereby certifies in behalf of said Company, that the above is a true and correct log of the formation encountered in drilling the above well as reflected by the Daily Drilling Reports.

PICKRELL DRILLING COMPANY
By [Signature]
C. W. Sebitts Attorney-in-Fact

STATE OF KANSAS }
COUNTY OF SEDGWICK } ss.

On this 7th day of August, 19 61, before me the undersigned, a Notary Public, in and for the County and State aforesaid, personally appeared C. W. Sebitts, to me known to be the identical person who subscribed the name of PICKRELL DRILLING COMPANY to the foregoing instrument as its Attorney-in-Fact and acknowledged to me that he executed the same as his free and voluntary act and deed, and as the free and voluntary act and deed of such company, for the uses and purposes therein set forth.

Given under my hand and seal of office the day and year last above written.

My commission expires: August 13, 1961

[Signature]
Ruth Sullivan
Notary Public