


STATE OF KANSAS
 STATE CORPORATION COMMISSION
 Give All Information Completely
 Make Required Affidavit
 Mail or Deliver Report to:
 Conservation Division
 State Corporation Commission
 800 Bitting Building
 Wichita, Kansas

WELL PLUGGING RECORD **15-025-00092-0000**

OR
 FORMATION PLUGGING RECORD Strike out upper line when reporting plugging of formations.

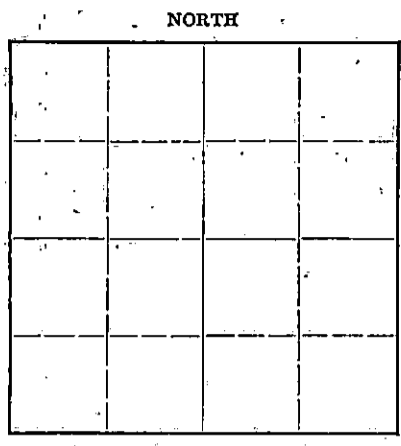

Locate well correctly on above Section Flat

Clark County. Sec. 12 Twp. 31S. Rge. 21 ~~W~~ (W)
 Location as "NE $\frac{1}{4}$ NW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines SE SE SE
 Lease Owner J.M. Huber Corporation, et al.
 Lease Name Berryman Well No. 1
 Office Address 302 Petroleum Building, Wichita 2, Kansas.
 Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
 Date well completed 10/10 19 47
 Application for plugging filed 10/10 19 47
 Application for plugging approved 10/13 19 47
 Plugging commenced 10/14 19 47
 Plugging completed 10/15 19 47
 Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19
 Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well H.W. Kerr
 Producing formation Depth to top Bottom Total Depth of Well 5310 Feet
 Show depth and thickness of all water, oil and gas formations:


OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Filled with heavy mud from 5310' up to 440', then dumped 25 sacks of cement from 440' to 415'. Mudded from 415' to about 15' from top and dumped 10 sacks and let run out into cellar.



(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to J.M. Huber Corporation, Mr. E.A. Huffman
 Address 302 Petroleum Building, Wichita 2, Kansas.

STATE OF Kansas, COUNTY OF Sedgwick, SS.

EDWARD A. HUFFMAN (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Edward A. Huffman
 Edward A. Huffman
 302 Petroleum Bldg., Wichita 2, Kansas.
 (Address)

SUBSCRIBED AND SWORN to before me this 4th day of November, 19 47.

Annette Jynell
 Notary Public.

My commission expires June 7, 1950

PLUGGING
 FILE SEC 12 31 R 71W
 BOOK PAGE 139 LINE 35

D R I L L E R ' S L O G

COMPANY NAME: J.M. HUBER CORPORATION & NORTHERN NATURAL GAS COMPANY LOCATION: SE SE SE, 12-31S-21W, Clark County, Kansas.
 CONTRACTOR: J.M. HUBER CORPORATION
 FARM NAME: Berryman & Briggs No. 1-A 15-025-00092-0000

COMMENCED: 9-7-47 PRODUCTION: D & A
 COMPLETED: 10-15-47

CASING USED: 16" @ 207 w/ 175 sx
 10" @ 1315 w/ 700 sx

Sand & Clay	145	Lime Chert-Rough	4634
Red Bed-Shells	360	Lime	4640
Gyp - Shells	395	Lime & Shale	4769
Sandy Red Beds	400	Lime Soft - Broken	4785
Sandy Red Rock	420	Lime	4825
Red Beds & Shells	505	Lime & Shale	4870
Sandy Red Bed - Shells	1040	Lime	4900
Lime	1050	Lime & Shale	4955
Red Bed - Shells	1150	Lime	4992
Anhydrite	1165	Lime - Cherty Shale	5035
Red Bed & Shells	1245	Lime Hard	5070
Red Bed, Shells Shale	1315	Lime	5095
Shale & Shells	1590	Lime & Shale	5130
Shale & Shells - Salt Streaks	1910	Lime - Shale	5165
Shale & Shells	1980	Lime & Shale	5215
Salt & Shale & Shells	2110	Shale - Lime Cherty	5235
Shale & Shells	2195	Lime	5260
Lime & Shale Breaks	2475	Lime Cherty	5280
Lime & Shale Streaks	2555	Cherty Lime & Shale	5310
Shale & Lime	2620	Total Depth	5310
Lime & Shale	2700		
Fort Riley	2710		
Lime & Shale Streaks	2760	<u>SAMPLE TOPS:</u>	
Lime & Shale Broken	2765	Top Anhydrite	1160
Lime & Shale	2910	Hollenberg	2480
Lime	2960	Herrington	2530
Shale & Lime	3000	Ft. Riley	2710
Shale & Lime Shells	3075	Heebner	4286
Lime & Shale	3220	Toronto	4325
Lime - Shale	3265	Brown Lansing	4477
Lime & Shale Streaks	3335	Top Lansing	4496
Lime & Shale	3395	Top Mississippi	5210-5310, no por. or shows.
Lime - Shale	3455		
Broken Lime & Shale	3560		
Lime & Shale	3655	DST 5214-60, open 25 min. rec. 15' mud, no BHP.	
Broken Lime - Shale	3735		
Lime & Shale	3859	Ran Schlumberger	
Lime	3914		
Lime - Broken	3990		
Lime & Shale	4055	Set bridging plug & tried twice to DST 4182-4210, Packer would not hold.	
Lime	4110		
Sand	4215		
Shale & Lime	4270		
Lime - Shale - Breaks	4325		
Lime & Shale Streaks	4370		
Lime & Shale	4405		
Lime	4470		
Lime & Shale	4600		
Lime	4631		

STATE OF KANSAS)
) SS
 COUNTY OF SEDGWICK)

I hereby certify that the above is a true and correct copy of the log of the Berryman & Briggs No. 1-A located in the Southeast Quarter of the Southeast Quarter of the Southeast Quarter of Section 12, Township 31 South, Range 21 West, Clark County, Kansas.

Edward A. Huffman
 Edward A. Huffman, District Manager,
 J.M. HUBER CORPORATION

Subscribed and sworn to before me this 6th day of November 1947.

Ranetta Spruell
 Notary Public

My Commission expires June 7, 1950.

Berryman & Briggs