

STATE OF KANSAS  
STATE CORPORATION COMMISSION


Form CP-4

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
212 No. Market  
Wichita, Kansas 67202

WELL PLUGGING RECORD

Pratt County, Sec. 23 Twp. 28S Rge. 12 (X) (W)

Location as "NE/CNW/SW" or footage from lines NWc NW NW  
Lease Owner Raymond Oil Co., Inc.  
Lease Name Chitwood #14 Well No.  
Office Address Wichita, Kansas 67202  
Character of Well (completed as Oil, Gas or Dry Hole)  
Date well completed 19  
Application for plugging filed 19  
Application for plugging approved 19  
Plugging commenced 12/18/69 19  
Plugging completed 12/23/69 19  
Reason for abandonment of well or producing formation depleted.

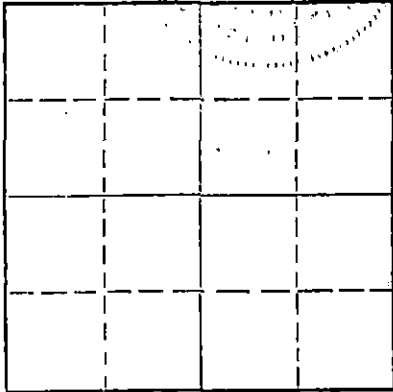

Locate well correctly on above  
Section Plat

If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Justice  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 3765 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8	333'	none
				5 1/2"	4348'	2091'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Checked hole to 3765', ran sand to 3730' and ran 5 sacks of cement.  
Loaded hole with water, shot pipe at 3154', worked pipe to 21" tension.  
Pumped load of water, ran 6 sacks mud and 3 sacks hulls, pumped 40 barrels oil and 80 barrels water at 700 lb. pressure, shot pipe at 2990', worked pipe. Pumped 2 loads water, shot pipe at 2837', 2687', 2534', 2386', pumped one load water, shot pipe at 2288', 2190', 2096', got loose and pulled 65 joints. Bailed hole to 250', ran 25 sacks cement. Mudded hole to 40', set 10' rock bridge and ran 10 sacks of cement. Tallied pipe.

PLUGGING COMPLETE.

RECEIVED  
STATE CORPORATION COMMISSION  
DEC 31 1969  
CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor KNIGHT CASING PULLING CO., INC.  
Address CHASE, KANSAS

STATE OF KANSAS, COUNTY OF RICE, ss.  
NOEL J. KNIGHT (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Noel Knight  
CHASE, KANSAS  
(Address)

Subscribed and Sworn to before me this 24th day of December, 19 69

NOTARY PUBLIC  
RICE COUNTY, KANSAS  
My commission expires 2/15/71

Margaret Malcher  
Notary Public.