

15-151-10475-00-00


STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit.
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas 67202

WELL PLUGGING RECORD

NORTH-

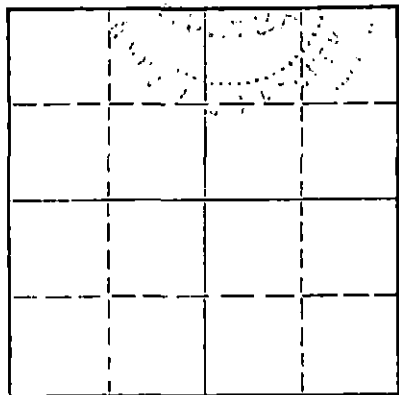

Locate well correctly on above
Section Plat

Pratt County, Sec. 23 Twp. 28 Rge. 12W (E) (W)
Location as "NE/CNW/SW" or footage from lines C E/2 NE/4 NW/4
Lease Owner Raymond Oil Co., Inc.
Lease Name Chitwood L#10 Well No.
Office Address Wichita, Kansas 67202
Character of Well (completed as Oil, Gas or Dry Hole)
Date well completed 19
Application for plugging filed 19
Application for plugging approved 19
Plugging commenced 3/9/70 19
Plugging completed 3/12/70 19
Reason for abandonment of well or producing formation depleted.

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Biberstein
Producing formation Depth to top Bottom Total Depth of Well 4496 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				10-3/4 5 1/2	314 4496	none 1996'

RECEIVED
STATE CORPORATION COMMISSION
MAR 19 1970
CONSERVATION DIVISION
Wichita, Kansas

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Checked hole to 4496', ran sand to 4380' and ran 5 sacks of cement.
Shot pipe at 3188', pumped hole, had hole in pipe, shot pipe at 2890',
2681', 2500', 2409', 2220', 2200', pulled 62 joints. Bailed
hole to 250', set 10' rock bridge and ran 35 sack sof cement. Mudded
hole to 40', set 10' rock bridge and ran 15 sacks of cement. Tallied
pipe.

PLUGGING COMPLETE.

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor KNIGHT CASING PULLING CO., INC.
Address CHASE, KANSAS


STATE OF KANSAS COUNTY OF RICE, ss.
NOEL J. KNIGHT

(employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Neil Knight
CHASE, KANSAS

(Address)

SUBSCRIBED AND SWORN TO before me this 13th day of March 19 70



Margaret Melcher
Notary Public.

My commission expires 2/15/71

RECEIVED
STATE CORPORATION COMMISSION
MAR 10 1970
CONSERVATION DIVISION
Wichita, Kansas

Lion Oil Company
El Dorado, Arkansas

Contractor: R. W. Rine Drilling Company
Started: 11-14-45 Finished: 1-10-46

Chitwood Well No. 18

Center E/2 NE/4 NW/4
Sec. 23-28S-12W
Pratt County, Kansas

LOG

Sand and clay	0- 121	
Shale and lime	121- 255	
Red bed and shale	255- 315	10 3/4" casing cemented @
Red bed	315- 450	314'
Shale and shells	450-1250	
Salt and shale	1250-1383	
Shale and shells	1383-1655	
Lime and shale	1655-1905	
Lime	1905-2100	
Lime and shale	2100-2404	
Shale	2404-2424	
Lime and shale	2424-3357	
Lime	3357-3424	
Lime and shale	3424-3631	
Lime	3631-4103	
Lime and shale	4103-4161	
Lime	4161-4181	
Lime and shale	4181-4291	
Lime	4291-4366	
Lime and shale	4366-4400	
Lime	4400-4420	
Shale and lime	4420-4450	
Lime	4450-4454	
Shale and lime	4454-4491	
Lime	4491-4498	5 1/2" casing cemented @ 4496'

Total Depth: 4498

State of Kansas) ss
County of Barton)

I, Clyde W. Goddard, do hereby certify that the above is a true and complete log of the Chitwood Well No. 18, located in the Center E/2 of the NE/4 of the NW/4, Section 23-28S-12W, in Pratt County, Kansas.

Clyde W. Goddard

Sworn to and subscribed before me this 11th day of January, 1946.

Supere H. Sloyer
Notary Public

My commission expires October 3, 1949.