


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission,
212 No. Market
Wichita, Kansas

WELL PLUGGING RECORD

Pratt County, Sec. 27 Twp. 28 Rge. 12 (E) (W)

Location as "NE/CNW/SW" or footage from lines NE NW NW
Lease Owner Raymond Oil Co., Inc.
Lease Name Chitwood D#1 Well No. _____
Office Address Wichita, Kansas 67202
Character of Well (completed as Oil, Gas or Dry Hole) _____
Date well completed _____ 19____
Application for plugging filed _____ 19____
Application for plugging approved _____ 19____
Plugging commenced 9/12/69 _____ 19____
Plugging completed 9/25/69 _____ 19____
Reason for abandonment of well or producing formation depleted.

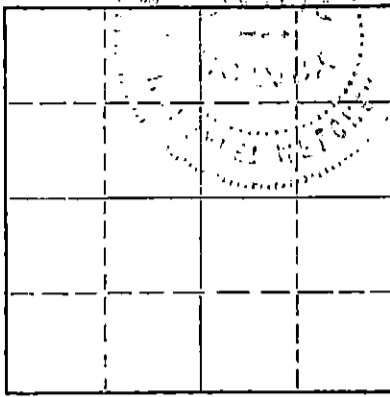

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Warren
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4459 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8	373'	none
				5 1/2"	4437	3241'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Choc ked hole to 4459', ran sand to 4420' and dumped 5 sacks of cement. Cut pipe off and welded collar on, rigged up over 5 1/2". Shot pipe at 3494', spotted 40 barrels of oil behind pipe, worked tension to 35", shot pipe at 3418', 3343', 3282', pipe came loose, pulled 106 joints. Bailed fluid down to 260' and set 10' rock bridge, dumped 25 sacks of cement. Mudded to 40', set 10' rock bridge and dumped 10 sacks of cement.

PLUGGING COMPLETE.


RECEIVED
STATE CORPORATION COMMISSION
SEP 30 1969
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor KNIGHT CASING PULLING CO., INC.
Address CHASE, KANSAS

STATE OF KANSAS, COUNTY OF RICE, ss.
NOEL J. KNIGHT (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Signature]
CHASE, KANSAS
(Address)

Subscribed AND Sworn to before me this 26th day of September, 19 69

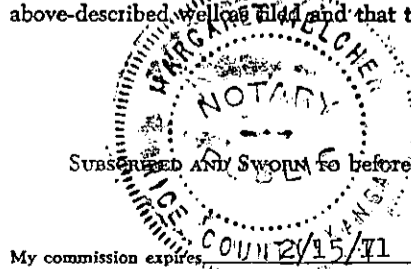

[Signature]
Notary Public.

INDIVIDUAL WELL RECORD

FORMATION AND COMPLETION DATA

LEASE Chitwood Unit

WELL NO. D-1

FORMATION TOPS

FORM NO. 176 - PAGE 2

FORMATION	ACTUAL		SUB-SEA		FORMATION	ACTUAL		SUB-SEA	
	TOP	BOTTOM	TOP	BOTTOM		TOP	BOTTOM	TOP	BOTTOM
Lansing	3745'		-1871'						
Mississippi	4197'		-2223'						
Viola	4329'		-2445'						
Simpson	4437'		-2563'						

RECEIVED
STATE CORPORATION COMMISSION
AUG 14 1969
CONSERVATION DIVISION
Wichita, Kansas

PERFORATION RECORD

FROM	TO	NO. SHOTS	SIZE SHOTS	DATE	REMARKS

ACIDIZATION RECORD:

SQUEEZE CEMENTING RECORD
