

STATE OF KANSAS
STATE CORPORATION COMMISSION


Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

WELL PLUGGING RECORD

Pratt County, Sec. 27 Twp. 28 Rge. 12 (E) (W)

Location as "NE/CNW/SW" or footage from lines C W/2 NW/4 N/4
Lease Owner Raymond Oil Co., Inc.
Lease Name Chitwood C#3 Well No. _____
Office Address Wichita, Kansas 67202
Character of Well (completed as Oil, Gas or Dry Hole) _____
Date well completed _____ 19____
Application for plugging filed _____ 19____
Application for plugging approved _____ 19____
Plugging commenced 9/17/69 _____ 19____
Plugging completed 9/24/69 _____ 19____
Reason for abandonment of well or producing formation depleted.
If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

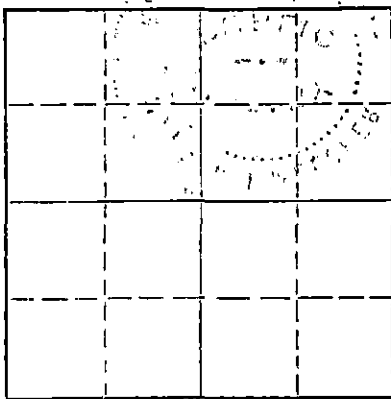

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Warren
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4437 1/2 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				10-3/4	412'	none
				5 1/2"	4424 1/2'	3239'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Checked hole to 4437', ran sand to 4400' and ran 5 sacks of cement. Loaded hole with water, shot pipe at 3496', hooked up pump, pressured up to 1500 lbs. pressure, lost plug out of head and fished it. Shot pipe at 3234', pumped 25 barrels oil and 80 barrels water, worked pipe loose and pulled 101 joints. Bailed hole to ~~250'~~ 250' and set 10' rock bridge and ran 35 sacks of cement. Mudded hole to 40' and set 10' rock bridge and ran 15 sacks of cement.

PLUGGING COMPLETE.

RECEIVED
STATE CORPORATION COMMISSION
SEP 30 1969
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
KNIGHT CASING PULLING CO., INC.

Name of Plugging Contractor CHASE, KANSAS
Address _____


STATE OF KANSAS COUNTY OF RICE, ss.
NOEL J. KNIGHT

(employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well is filed and that the same are true and correct. So help me God.

(Signature) _____

Chase, Kansas
(Address)

Subscribed and sworn to before me this 26th day of September, 19 69

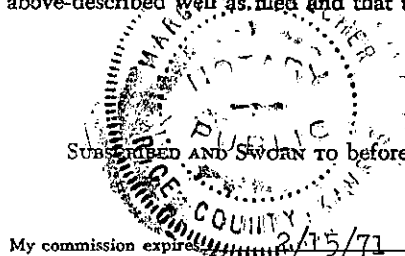

Margaret Melcher
Notary Public.

