

STATE OF KANSAS  
STATE CORPORATION COMMISSION


Form CP-4

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
212 No. Market  
Wichita, Kansas

WELL PLUGGING RECORD

Kingman County, Sec. 22 Twp. 29S Rge. (E) 8 (W)

Location as "NE/CNW/SW" or footage from lines C SE NE  
Lease Owner Pickrell Drilling Company  
Lease Name Harner "A" Well No. 1  
Office Address 705 Fourth National Bank Bldg., Wichita, Kansas 67202  
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole  
Date well completed January 3, 1968  
Application for plugging filed January 3, 1968  
Application for plugging approved January 3, 1968  
Plugging commenced January 3, 1968  
Plugging completed January 3, 1968  
Reason for abandonment of well or producing formation Dry Hole



If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Mr. Archie Elving  
Producing formation Depth to top Bottom Total Depth of Well 4270 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	220'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Heavy mud to 200'. Set plug. Cemented with 23 sacks cement. Heavy mud to 40'. Set plug. Cemented to bottom of cellar with 10 sacks cement. Plugged rat hole with 2 sacks cement.

RECEIVED  
STATE CORPORATION COMMISSION  
JAN 10 1968  
CONSERVATION DIVISION  
Wichita, Kansas


(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Pickrell Drilling Company  
Address 705 Fourth National Bank Bldg., Wichita, Kansas 67202

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.  
C. W. Sebitts (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) C. W. Sebitts  
705 Fourth Nat Bank Bldg, Wichita, Kansas 67202  
(Address)

Subscribed and sworn to before me this 9th day of January, 1968

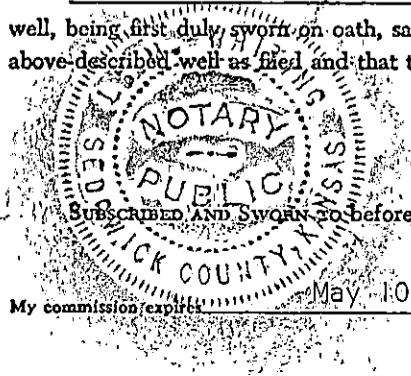

L. M. Whiting  
Notary Public.

My commission expires May 10, 1970

ROTARY DRILLING LOG

COMPANY: Pickrell Drilling Company  
705 Fourth National Bank Bldg.  
Wichita, Kansas 67202

Rotary Drilling Commenced: 12/22/67

Rotary Drilling Completed 1/3/68

LOCATION: Harner "A" No. 1  
C SE NE Section 22-29S-8W  
Kingman County, Kansas

CONTRACTOR: **PICKRELL DRILLING COMPANY**  
Wichita, Kansas

CASING RECORD: (1) jts.) 8 5/8" surface casing set at 220' and cemented with 160 sacks of cement. Circulated. Job complete at 4:30 PM, December 22, 1967. No oil string was run. D. & A., plugged January 3, 1968.

LOG

(Figures indicate bottom of formation — measurements from top of rotary bushing.)

90	Clay & Shale	<u>C. F. S.</u>
220	Red Rock & Cement	3855'
650	Red Rock & Shale	3885'
900	Shale	3920'
1855	Lime & Shale	4235'
1960	Lime	4250'
3300	Lime & Shale	4260'
3483	Shale	4270'
3575	Lime & Shale	
3700	Lime	
3823	Lime & Shale	<u>Slope Tests</u>
3865	Lime	3000'
4192	Shale & Lime	3500'
4224	Shale	4000'
4250	Mississippi	
4270	Chert & Lime (Miss.), RTD	
		<u>S. L. M.</u>
		3733' (No corr.)

RECEIVED  
STATE CORPORATION COMMISSION  
JAN 10 1968  
CONSERVATION DIVISION  
Wichita, Kansas

The undersigned, C. W. Sebitts, Attorney-in-Fact for PICKRELL DRILLING COMPANY, hereby certifies in behalf of said Company, that the above is a true and correct log of the formation encountered in drilling the above well as reflected by the Daily Drilling Reports.

PICKRELL DRILLING COMPANY  
By [Signature]  
C. W. Sebitts, Attorney-in-Fact

STATE OF KANSAS  
COUNTY OF SEDGWICK } ss.:

On this 10th day of January, 19 68, before me the undersigned, a Notary Public, in and for the County and State aforesaid, personally appeared C. W. Sebitts, to me known to be the identical person who subscribed the name of PICKRELL DRILLING COMPANY to the foregoing instrument as its Attorney-in-Fact and acknowledged to me that he executed the same as his free and voluntary act and deed, and as the free and voluntary act and deed of such company, for the uses and purposes therein set forth.

Given under my hand and seal of office the day and year last above written.

My commission expires May 10, 1970

[Signature]  
Notary Public  
L. M. Whiting