


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Kingman County. Sec. 13 Twp. 29S Rge. 8W ~~XXXX~~
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines _____
Approx. C - SW/4

Lease Owner Keener Oil Company
Lease Name Lawrence Barton Well No. 1
Office Address 406 National Bank of Tulsa Bldg., Tulsa
Character of Well (Completed as Oil, Gas or Dry Hole) _____
Dry Hole

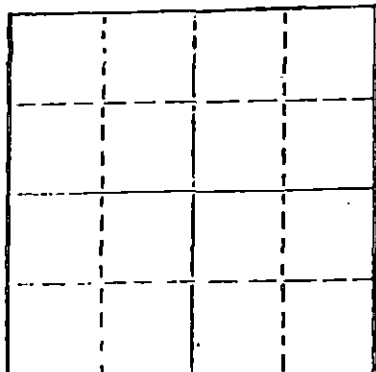

Locate well correctly on above
Section Plat

Date Well completed October 13, 1977
Application for plugging filed Verbal Application 19__
Application for plugging approved Verbal Approval 19__
Plugging commenced October 13, 1977
Plugging completed October 13, 1977
Reason for abandonment of well or producing formation _____

If a producing well is abandoned, date of last production _____ 19__

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Wm. T. Owen
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4176'
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTAINED	FROM	TO	SIZE	PUT IN	PULLED OUT
	RECEIVED STATE CORPORATION COMMISSION			8-5/8"	215'	None
	OCT 20 1977					

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled hole with heavy rotary mud from 4176 ft. (rotary total depth) to 210 ft. Set plug at 210 ft. and cemented with 35 sacks cement.
Filled hole with heavy rotary mud from 210 ft. to 40 ft.
Set solid plug at 40 ft. and cemented to cellar with 13 sacks cement, 3 sacks cement in rat hole.


Plugging operations accomplished utilizing Halliburton Oil Well Cementing pump truck through 4-1/2 inch drill pipe.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Halliburton Services
410 Union Center Bldg., Wichita, Kansas 67202

STATE OF Kansas COUNTY OF Sedgwick, ss.
Dean Britting, Agent (~~employee~~ of owner) ~~xxxxxxxxxxx~~
of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed, and that the same are true and correct. So help me God.

(Signature) Dean Britting
200 No. Main, Wichita, Kansas 67202
(Address)



SUBSCRIBED AND SWORN TO before me this 19th day of October, 19 77

Elsie Willison
Elsie Willison - Notary Public.

My commission expires June 30, 1978


KANSAS GEOLOGICAL SOCIETY SPI # 15-095-20,634-0000
 KANSAS WELL LOG BUREAU - KANSAS WELL SAMPLE BUREAU
 KANSAS GEOLOGICAL SOCIETY BUILDING
 508 EAST MURDOCK - WICHITA, KANSAS

COMPANY **Keener Oil Company**
 FARM **Lawrence Barton NO. 1**

SEC. **13** T. **29S** R. **8W**
 LOC. **Approx. C - SW/4**

TOTAL DEPTH **4176'**
 COMM. **October 3, 1977** COMP. **October 13, 1977**
 SHOT OR TREATED
 CONTRACTOR **H-30, Inc.**
 ISSUED **October 19, 1977**

COUNTY **Kingman**
 KANSAS



CASING
 20 10
 15 8-5/8" 215' cemented w/200 sxs cement ELEVATION **1597 KB**
 12 6
 13 5

PRODUCTION

FIGURES INDICATE BOTTOM OF FORMATIONS

Red Bed	510'
Shale	1165'
Shale and Lime	1215'
Lime and Shale	3135'
Shale and Lime	3280'
Lime and Shale	4176'
Rotary Total Depth	4176'

I hereby certify the above and foregoing to be a true and correct log of the above described well as shown by the drilling reports.

RECEIVED
 STATE CORPORATION COMMISSION

H-30, INC.

OCT 20 1977


Dean Britting
 Dean Britting

State of Kansas

County of Sedgwick

CONSERVATION DIVISION
 Wichita, Kansas
 SS:

Subscribed and Sworn to before me a Notary Public
 in and for said county and state this 19th. day
 of October, 1977.



Elsie Willison
 Elsie Willison - Notary Public

My Commission Expires:

June 30, 1978