


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

Kingman County. Sec. 12 Twp. 29 Rge. (E) 8 (W)
Location as "NE/CNW%SW%" or footage from lines NW NW NE
Lease Owner Rupp-Ferguson Oil Co.
Lease Name Sloan Well No. 1
Office Address 522 Union Center, Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed 12-5-57 19
Application for plugging filed 12-5-57 19
Application for plugging approved 12-5-57 19
Plugging commenced 12-5-57 19
Plugging completed 12-5-57 19
Reason for abandonment of well or producing formation

NORTH



Locate well correctly on above
Section Plat

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well M. A. Rives
Producing formation Depth to top Bottom Total Depth of Well 4260 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	270	0

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Filled hole with heavy mud to 250, 1/2 sack hulls, plug, 20 sax cement thru d.p. Mud to 35', 1/3 sack hulls, plug, cement to base of cellar.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Rupp-Ferguson Oil Co.
Address 522 Union Center, Wichita, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.
L. W. Knox (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) L. W. Knox
522 Union Center, Wichita, Kansas
(Address)

SUBSCRIBED AND SWORN to before me this 10th day of December, 19 57

My commission expires June 4, 1959

Helen Horine

RECEIVED Notary Public.
STATE CORPORATION COMMISSION

PLUGGING
FILE SEC. 12 T. 29 R. 8 E.
BOOK PAGE 67 LINE 28

DEC 11 1957
CONSERVATION DIVISION
Wichita, Kansas

CONTRACTOR'S WELL LOG

Rupp-Ferguson No. 1 Sloan
 NE NE NE, Sec. 12-29-37,
 Kingman County, Kansas

Set 270' of 8 3/8" surface casg. w/200 sax.

D & A

Commenced: 11-25-57

Completed: 12-5-57

Elevation 1625 KB

Contractor: Rupp-Ferguson Oil Co.

Figures Indicate Bottom of Formation

85 sand & sand rock
 378 red bed
 910 shale & shells
 1084 salt
 1490 lime & shale
 1789 lime, shale & sand stringers
 1905 sandy lime & shale
 2190 shale & lime streaks
 2430 shale & lime stringers
 2634 shale & lime shells
 2925 shale & lime
 3531 lime
 3312 lime & shale
 3418 sand & shale
 3764 lime
 3877 lime & shale
 3932 lime
 3995 lime & shale
 4026 lime
 4162 lime & shale
 4250 Miss.
 T.D.

STATE OF KANSAS)
 BEDFORD COUNTY) 39:


I, L. W. Knox, Landman for Rupp-Ferguson Oil Co., do hereby certify that the above and foregoing is a true and correct copy of the log of the No. 1 Sloan well.

L. W. Knox
 L. W. Knox

Subscribed and sworn to before me this 10th day of December, 1957.

Helen Horne
 Notary Public

My Commission Expires June 4, 1959.

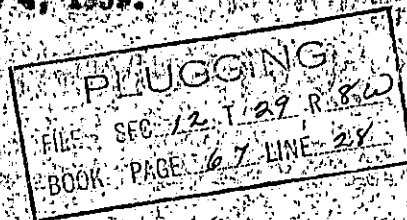

RECEIVED
 STATE CORPORATION COMMISSION

DEC 11 1957

REGISTRATION DIVISION