


STATE OF KANSAS  
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to  
Conservation Division  
State Corporation Comm.  
245 North Water  
Wichita, KS 67202

Kingman County, Sec. 6 Twp. 29S Rge. 8W ~~NE~~  
Location as "NE/CNW $\frac{1}{4}$ /SW $\frac{1}{4}$ " or footage from lines  
NW SE

Lease Owner Donald T. Ingling  
Lease Name Funke-Bergh Well No. 1  
Office Address 1018 -1st. National Bank Bldg., Wichita  
Character of Well (Completed as Oil, Gas or Dry Hole) Dry Hole

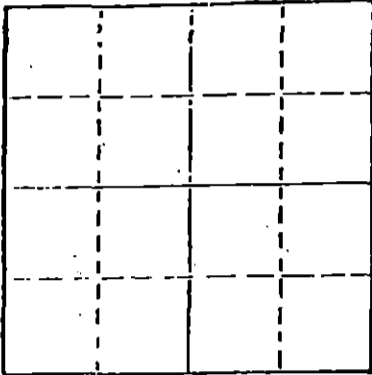

Locate well correctly on above  
Section Plot

Date Well completed March 26, 1977  
Application for plugging filed Verbal Application 1977  
Application for plugging approved Verbal Approval 1977  
Plugging commenced March 26, 1977  
Plugging completed March 26, 1977  
Reason for abandonment of well or producing formation \_\_\_\_\_

If a producing well is abandoned, date of last production \_\_\_\_\_ 1977

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Buddy Metz  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 4550'  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	240'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Filled hole with heavy rotary mud from 4,550 ft. (rotary total depth)

to 240 ft. Set plug at 240 ft. and cemented with 35 sacks cement.

Filled hole with heavy rotary mud from 240 ft. to 40 ft. Set solid plug at 40 ft. and cemented to cellar with 15 sacks cement, 5 sacks cement in rat hole.

RECEIVED

STATE CORPORATION COMMISSION

APR 11 1977

(If additional description is necessary, use BACK of this sheet) DIVISION

Name of Plugging Contractor H-30, Inc. Wichita, Kansas  
200 No. Main, Wichita, Kansas 67202

STATE OF Kansas COUNTY OF Sedgwick, ss.  
Dean Britting, Agent (~~employee of owner~~) ~~or (owner or operator)~~


of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Dean Britting  
200 No. Main, Wichita, Kansas 67202  
(Address)

SUBSCRIBED AND SWORN TO before me this 31st. day of March, 19 77

Elsie Willison  
Elsie Willison - Notary Public.

My commission expires June 30, 1978



KANSAS GEOLOGICAL SOCIETY API NO. - 15-095-20,550-  
 KANSAS WELL LOG BUREAU - KANSAS WELL SAMPLE BUREAU  
 KANSAS GEOLOGICAL SOCIETY BUILDING  
 508 EAST MURDOCK - WICHITA, KANSAS

0000

COMPANY Donald T. Ingling

SEC. 6 T. 29S R. 8W  
 LOC. NW SE


FARM Funke-Bergh NO. 1

TOTAL DEPTH 4,550'  
 COMM. March 17, 1977  
 SHOT OR TREATED  
 CONTRACTOR H-30, Inc.  
 ISSUED March 31, 1977

COMP. March 26, 1977

COUNTY Kingman

KANSAS



CASING

20	10				
15	8	-5/8"	240'	cemented w/225 sxs cement	ELEVATION 1,685 K.B.
12	6				
13	5				

PRODUCTION

FIGURES INDICATE BOTTOM OF FORMATIONS

Sand	185'
Red Bed	635'
Red Bed, Shale and Lime	1,615'
Lime and Shale	2,042'
Shale and Lime	2,360'
Lime and Shale	4,190'
Chert and Lime	4,240'
Lime and Shale	4,412'
Shale	4,448'
Lime and Shale	4,535'
Sand	4,550'
Rotary Total Depth	4,550'

RECEIVED  
 THE CORPORATION COMMISSION

APR 01 1977

CONSERVATION DIVISION  
 Wichita, Kansas


I hereby certify the above and foregoing to be  
 a true and correct log of the above described  
 well as shown by the drilling reports.

H-30, INC.

*Dean Britting*  
 Dean Britting

State of Kansas }  
 County of Sedgwick } ss:

Subscribed and Sworn to before me a Notary Public  
 in and for said county and state this 31st. day  
 of March, 1977.



*Elsie Willison*  
 Elsie Willison - Notary Public

My Commission Expires:

June 30, 1978