

15-095-00265-0000

STATE OF KANSAS
STATE CORPORATION COMMISSION


WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

Kingman County, Sec. 27 Twp. 30S Rge. 6W (E) (W)

Location as "NE/CNW/SW" or footage from lines SW SW NW
Lease Owner Sierra Petroleum Co., Inc.
Lease Name CRANE Well No. 1
Office Address 420 W. Douglas Ave., Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) dry
Date well completed 6/20/57 19
Application for plugging filed 6/19/57 19
Application for plugging approved 6/19/57 19
Plugging commenced 6/20/57 19
Plugging completed 6/20/57 19
Reason for abandonment of well or producing formation dry

NORTH

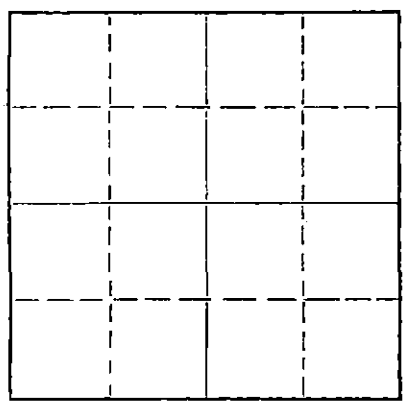

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Milton Galyardt
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4675 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	256	none

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

PLUGGING RECORD

Filled hole with heavy mud from 4675 up to 250'. Set bridge with 1/2 sack hulls wood poug and 10 gal rock, 20 sacks cement through drill pipe. Filled hole with heavy mud up to 40'. Set bridge with 1/2 sack hulls, wood plug and 10 sacks to cellar 0. Job completed 6:45 p.m. 6/20/57
Mr. Galyardt

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Sierra Petroleum Co., Inc.
Address 420 W. Douglas Ave., Wichita, Kansas

STATE OF KANSAS, COUNTY OF RUSSELL, ss.
S. P. Hall (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) S. P. Hall

(Address)

SUBSCRIBED AND SWORN TO before me this 21 day of June, 1957

1-30-61.

My commission expires _____

Margie Cooper
RECEIVED
STATE CORPORATION COMMISSION Notary Public.

PLUGGING
FILE SEC 27 T 30 6W
BOOK PAGE 22 LINE 34

JUN 22 1957
CONSERVATION DIVISION
Wichita, Kansas

Sierra Petroleum Co., Inc.

CRANE #1

SW SW NW Sec. 27-30-6
Kingman County, Kansas

Total Depth: 4675

Elev: 1425 KB

Comm: 6/2/57
Comp: 6/20/57

Casings:

8 5/8 @ 256

Cement:

200 sacks cement

FORMATION	DEPTH
Red Bed	315
Shale	985
Lime & shale	3188
Shale & lime w/chert	3430
Shale & lime	3620
Lime	3774
Lime & shale	4140
Miss lime	4192
Lime & chert w/shale	4305
Shale & chert	4415
Shale & lime	4515
Shale & sand	4537
Lime hard	4540
Shale lime & sand	4564
Shale	4621
Shale & sand	4650
Arbuckle	4675
Tops:	
Heebner	3022
Douglas	3312
Kansas City	3564
Mississippi	4122
Kinderhook	4406
Arbuckle	4650

STATE OF KANSAS)
) ss:
COUNTY OF RUSSELL)

I hereby certify that the above information is true and correct to the best of my knowledge.

S. P. Hall

Subscribed and sworn to before me this 21st day of June, 1957.

Margie Cooper
Notary Public

My commission expires: 1-30-61.

RECORDED
STATE CORPORATION
JUN 22 1957

CONSERVATION DIVISION
Wichita, Kansas

PLUGGING
FILE SEC 27 T 30 LW
BOOK PAGE 22 LINE 34