


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Kingman County. Sec. 26 Twp. 30S Rge. 6W EXW
Location as "NE/CNW $\frac{1}{4}$ /SW $\frac{1}{4}$ " or footage from lines _____
NE SE
Lease Owner KRM Petroleum Corporation
Lease Name J. G. Shore Well No. 1
Office Address Guaranty Bank Bldg., 817 17th St., Denver
Character of Well (Completed as Oil, Gas or Dry Hole) Colorado
Dry Hole 80202
Date Well completed January 15, 1978
Application for plugging filed Verbal Application 19
Application for plugging approved Verbal Approval 19
Plugging commenced January 15, 1978
Plugging completed January 15, 1978
Reason for abandonment of well or producing formation _____

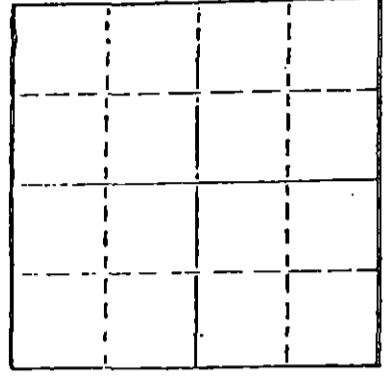

Locate well correctly on above
Section Plat

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or
its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Wm. T. Owen
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4,585'
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	264'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled hole with heavy rotary mud from 4,585 ft. (rotary total depth) to 264 ft. Set plug at 264 ft. and cemented with 35 sacks cement. Filled hole with heavy rotary mud from 264 ft. to 40 ft. Set solid plug at 40 ft. and cemented to cellar with 12 sacks cement, 3 sacks cement in rat hole.

Plugging operations accomplished utilizing Allied Oil Well cementing pump truck through 4 1/2 inch drill pipe.

RECEIVED
STATE CORPORATION COMMISSION

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Allied Cementing Co., Inc. JAN 25 1978
Box 31, Russell, Kansas 67665

STATE OF Kansas COUNTY OF Sedgwick
Dean Britting, Agent (Agent of owner) ~~XXXXXXXXXXXXXXXXXXXX~~

of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Dean Britting
200 N. Main, Wichita, KS 67202
(Address)

SUBSCRIBED AND SWORN TO before me this 23rd day of January, 1978

My commission expires June 30, 1978
Elsie Willison - Notary Public.



KANSAS GEOLOGICAL SOCIETY API# 15-095-20,667-0000
 KANSAS WELL LOG BUREAU - KANSAS WELL SAMPLE BUREAU
 KANSAS GEOLOGICAL SOCIETY BUILDING
 508 EAST MURDOCK - WICHITA, KANSAS

COMPANY **KRM Petroleum Corporation**

SEC. 26 T. 30S R. 6W

FARM **J. G. Shore**

NO. 1

LOC. NE SE

TOTAL DEPTH **4,585'**

COUNTY **Kingman**

COMM. **January 2, 1978**


COMP. **January 15, 1978**

SHOT OR TREATED

CONTRACTOR **H-30, Inc.**

ISSUED **January 23, 1978**

KANSAS



CASING

20	10		
15	8-5/8"	264' cemented w/225 sxs cement	ELEVATION 1,354 K.B.
12	6		
13	5		

PRODUCTION

FIGURES INDICATE BOTTOM OF FORMATIONS

Sand	36'
Red Bed	385'
Shale and Lime	595'
Shale	897'
Anhydrite	907'
Lime and Shale	1,185'
Shale and Lime	1,274'
Lime and Shale	2,005'
Shale and Lime	2,725'
Lime and Shale	3,745'
Lime	3,830'
Lime and Shale	4,569'
Sand	4,585'
Rotary Total Depth	4,585'

RECEIVED
STATE CORPORATION COMMISSION

JAN 25 1978

CORPORATION COMMISSION
Wichita, Kansas

I hereby certify the above and foregoing to be a true and correct log of the above described well as shown by the drilling reports.

H-30, INC.

Dean Britting

 Dean Britting

State of Kansas }
 County of Sedgwick } ss:

Suscribed and Sworn to before me a Notary Public in and for said county and state this 23rd day of January, 1978.



Elsie Willison

 Elsie Willison - Notary Public

My Commission Expires:

June 30, 1978