


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

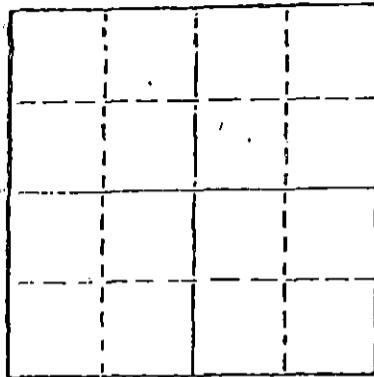

Name of Conservation Agent who supervised plugging of this well William T. Owen
Producing formation Depth to top Bottom Total Depth of Well 4,350
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	277'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled hole with heavy rotary mud from 4,350 ft. (rotary total depth) to 270 ft. Set plug at 270 ft. and cemented with 40 sacks cement. Filled hole with heavy rotary mud from 270 ft. to 40 ft. Set solid plug at 40 ft. and cemented to cellar with 10 sacks cement, 5 sacks cement in rat hole.

Plugging operations accomplished utilizing Halliburton Oil Well cementing pump truck through 4½ inch drill pipe.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Halliburton Services
410 Union Center Bldg., Wichita, Kansas, 67202

STATE OF Kansas COUNTY OF Sedgwick, ss.
Dean Britting, Agent Employee of owner XXXXX (owner or operator)
of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature)

Dean Britting
200 N. Main, Wichita, Kansas 67202

(Address)

SUBSCRIBED AND SWORN TO before me this 2nd day of April, 1980.

Elsie Willison - Notary Public.
Elsie Willison

My commission expires July 25, 1982

KANSAS DRILLERS LOG

COMPANY Monsanto Company

SEC. 29 T. 30S R. 6W
Loc. C-SW NE

FARM Reida

NO. 1

COUNTY Kingman

ROTARY TOTAL DEPTH 4,350'

COMM. March 15, 1980

COMP. March 24, 1980

CONTRACTOR H-30, INC. (Rig #3)

ISSUED April 2, 1980

CASINO

10 3/4" 8 5/8" Set at 277' cemented w/275 cxs cement
5 1/2"
4 1/2"

ELEVATION 1,469' K.B.

FIGURES INDICATE BOTTOM OF FORMATIONS

Red Bed and Shale	278'
Sand and Red Bed	625'
Red Bed and Shale	812'
Shale	1,065'
Shale and Lime	1,615'
Lime and Shale	2,050'
Shale and Lime	2,285'
Lime and Shale	2,760'
Shale and Lime	2,985'
Lime and Shale	4,207'
Lime	4,350'
Rotary Total Depth	4,350'

I hereby certify the above and foregoing to be
 a true and correct log of the above described
 well as shown by the drilling reports.


H-30, INC.



Dean Britting


 State of Kansas)
 County of Sedgwick)
 ss:

Subscribed and Sworn to before me a Notary Public⁵ 1980
 in and for said county and state this 2nd day of April, 1980.



NOTARY PUBLIC

 RECEIVED
 STATE CORPORATION COMMISSION
 APR 5 1980
 INSERVATION DIVISION
 WILLIS, Kansas



Elsie Willison
 Elsie Willison - Notary Public

By Commission Expires:

July 25, 1982