



JOHN ANDERSON, Jr. Governor
 RICHARD C. BYRD Chairman
 ALVIN F. GRAUERHOLZ Commissioner
 HARRY G. WILES Commissioner
 RAYMOND B. HARVEY Secretary
 CHARLES C. McCARTER Gen. Counsel

State Corporation Commission

CONSERVATION DIVISION

(Oil, Gas and Water)
 500 Insurance Bldg. 212 N. Market
 WICHITA, KANSAS

VERBAL PERMIT FORM
 (To Be Filed By Plugging Agent)

~~15-129-20424-0000~~

RECEIVED
STATE CORPORATION COMMISSION

JUN 22 1964

15-129-10097-00-00
 J. P. Roberts
 Assistant Director
 500 Insurance Building
 212 North Market
 Wichita 2, Kansas

CONSERVATION DIVISION
Wichita, Kansas

Dear Sir:

Mr. Sargent of Messman-Rinehart Oil Co. has this date requested permission to plug the following described well:

Mr. Sargent guarantees payment of the plugging fee.

Operator's full Name: Messman-Rinehart Oil Co.

Complete Address: 1432 Wichita Plaza. Wichita, Kansas

Lease Name: Vratil Well No. # 1

Location: Ctr. NW Sec. 15 Twp. 31 Rge. (E) (W) 47

County Morton Total Depth 5475' Oil Well X

Gas Well Input Well SWD Well D & A X Lost Hole

Mr. Sargent was instructed to plug the well as follows:

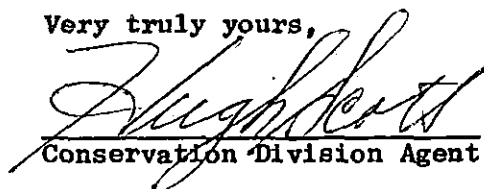
8 5/8"-1500' Circulated w/cement. 4 1/2"-5473' Cemented.

Top Perforations 5393' Plug back w/20 Sax.cement top cement 5300'

Mud 5300' to 700' Spotted 35 Sax.cement 700' to 600'

Mud 600' to 45' Plug, Hulls, 15 Sax.cement 45' to 0

Very truly yours,


 Conservation Division Agent