



JOHN CARLIN
R. C. LOUX
JANE T. ROY
PHILLIP R. DICK
CAROL J. LARSON

Governor
Chairman
Commissioner
Commissioner
Executive Secretary

State Corporation Commission

CONSERVATION DIVISION

(Oil, Gas and Water)
245 North Water

WICHITA, KANSAS 67202

December 13, 1980

VERBAL PERMIT FORM
(To be filed by Plugging Agent)
15-025-20429-0000

Dear Sir:

Mr. Butch Steinert of Eagle Drilling Company has this date requested permission to plug the following described well:

Operator's Full Name: Imperial Oil Company

Complete Address: 220 Fourth Financial Center, Wichita, Kansas

Lease Name: Schieb Well No. 4-18

Location: 550' FSL 550' FWL
C N/2 N/2 NW Sec. 18 Twp. 31 Rge. 21 (W)

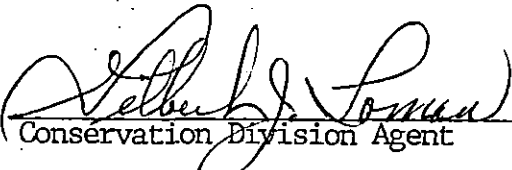
County: Clark Total Depth: 5263'

Abandoned Oil Well Gas Well Input Well SWD Well D&A

Other well as hereafter indicated: _____

Mr. Steinert was instructed to plug the well as follows:

8 5/8" - 645' - 175 sacks Common 200 sacks light cement. Fill hole with mud.
Pump 55 sacks cement through drill pipe at 655'. Pump 25
sacks cement through drill pipe at 200'. Push plug and 1/2
sack hulls to 40' and cap hole with 10 sacks cement.
Bridge rat hole and cement with 5 sacks cement.
Bridge mousehole and cement with 5 sacks cement.

Very truly yours,

Conservation Division Agent

STATE RECEIVED
CONSERVATION COMMISSION
DEC 18 1980
CONSERVATION DIVISION
Wichita, Kansas